


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East quarter Corner of Section 16, Township 134, Range 30, 5th P.M.  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 5/29/1984 placed a 4"x20" Cast iron monument proportionally between  
DATE  
the SE and NE corners

### SKETCH OF REFERENCE TIES

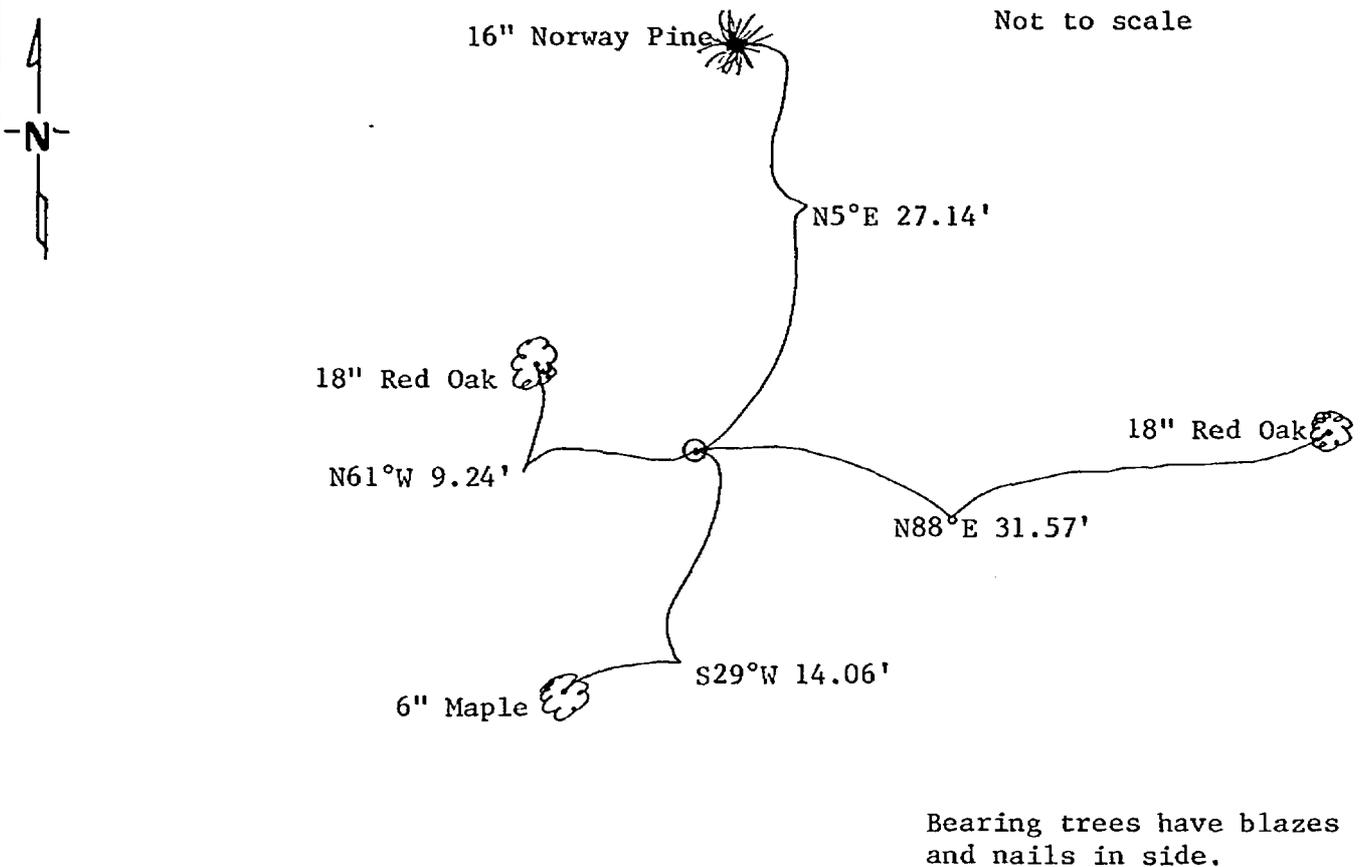

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ray A. Stever 3/29/85  
SIGNATURE DATE

Registration No. 12684

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

281037  
 OFFICE OF THE REGISTER OF DEEDS  
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:15 A .M. on the 29 day of March A.D., 1985

Register of Deeds Clouline Kaylor  
 By MS, Deputy

DOCUMENT NO. 281037

STATEMENT OF EVIDENCE

- 1868 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 11" White Pine S6°W 11 lks., 10" Poplar S55°E 4 lks.
- 1984 Survey Technician Terry Freeman and Forester Dan Marcum traversed from the SE corner to the NE corner. Distance agrees well with the 1911 notes. On May 5, set a Cass County cast iron monument proportionally between the SE and NE corners. The following bearing trees were marked: 18" Red Oak N61°W 9.24', 16" Norway Pine N5°E 27.14', 18" Red Oak N88°E 31.57', 6" Maple S29°W 14.06'. The distance from the NE corner to SE corner in the 1984 survey was 5280.81'. A search was made and no original B.T.'s could be found.
- 1911 County Survey Record Book "A" page 469, shows a survey by A.W. Moulster. He traversed the East line of Section 16 and the quarter corner was gone. The 1911 distance from NE corner to SE corner was 5278.66'.