

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East 1/4 Corner of Section 6, Township 144N, Range 25W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10-29-84 placed a 2 1/2 inch (O.D.) by 5 foot long galvanized iron pipe with 3" brass cap stamped as shown. Up 1.5 feet
DATE

5° East declination

SKETCH OF REFERENCE TIES

Not to Scale

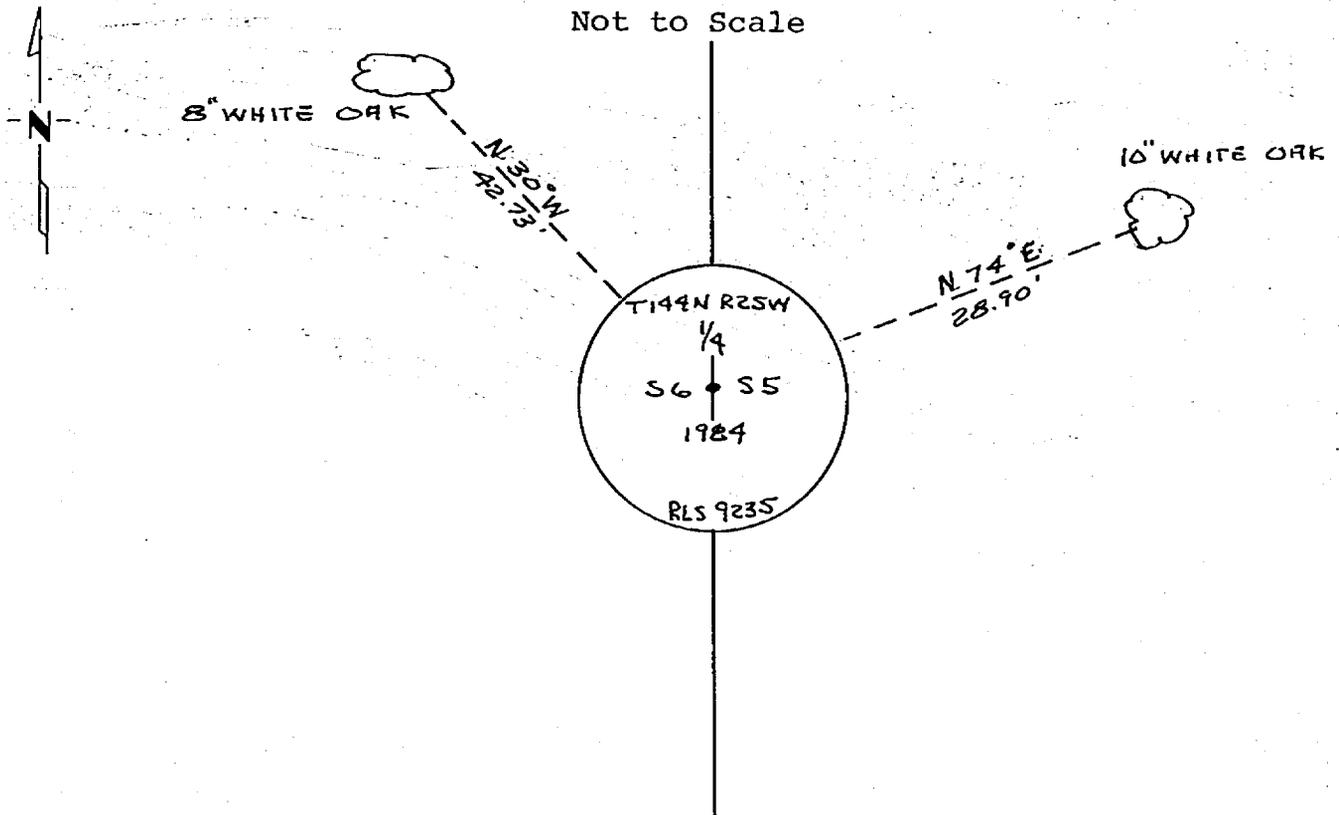

Note:

Trees are blazed & scribed with B.T. Tag
 Distances are shown to 20^d nail in notch
 painted red in side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 3/29/85
SIGNATURE DATE

Registration No. 9235

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

281665
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:20 P.M. on the 2 day of May A.D., 1985

County Recorder Clondine Kaylor

By M.S., Deputy

DOCUMENT NO. 281665

Statement of Evidence:

C5

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 14" Norway Pine that bears N75°E a distance of 44 links [29.04 feet]
A 6" Aspen that bears S79°W a distance of 10 links [6.60 feet]

On June 21, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail.

On October 29, 1984, an additional search was made by Advance prior to reestablishing this corner at its "lost" position on line between adjacent Section corners and distance prorated.