

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 17, Township 137, Range 29, 5th P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 3/22/1985 found a 2" I.P. for corner and 2" I.P. NW 46.7' as a tie
DATE
as shown on a 1922 Corner Certificate
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

Not to scale

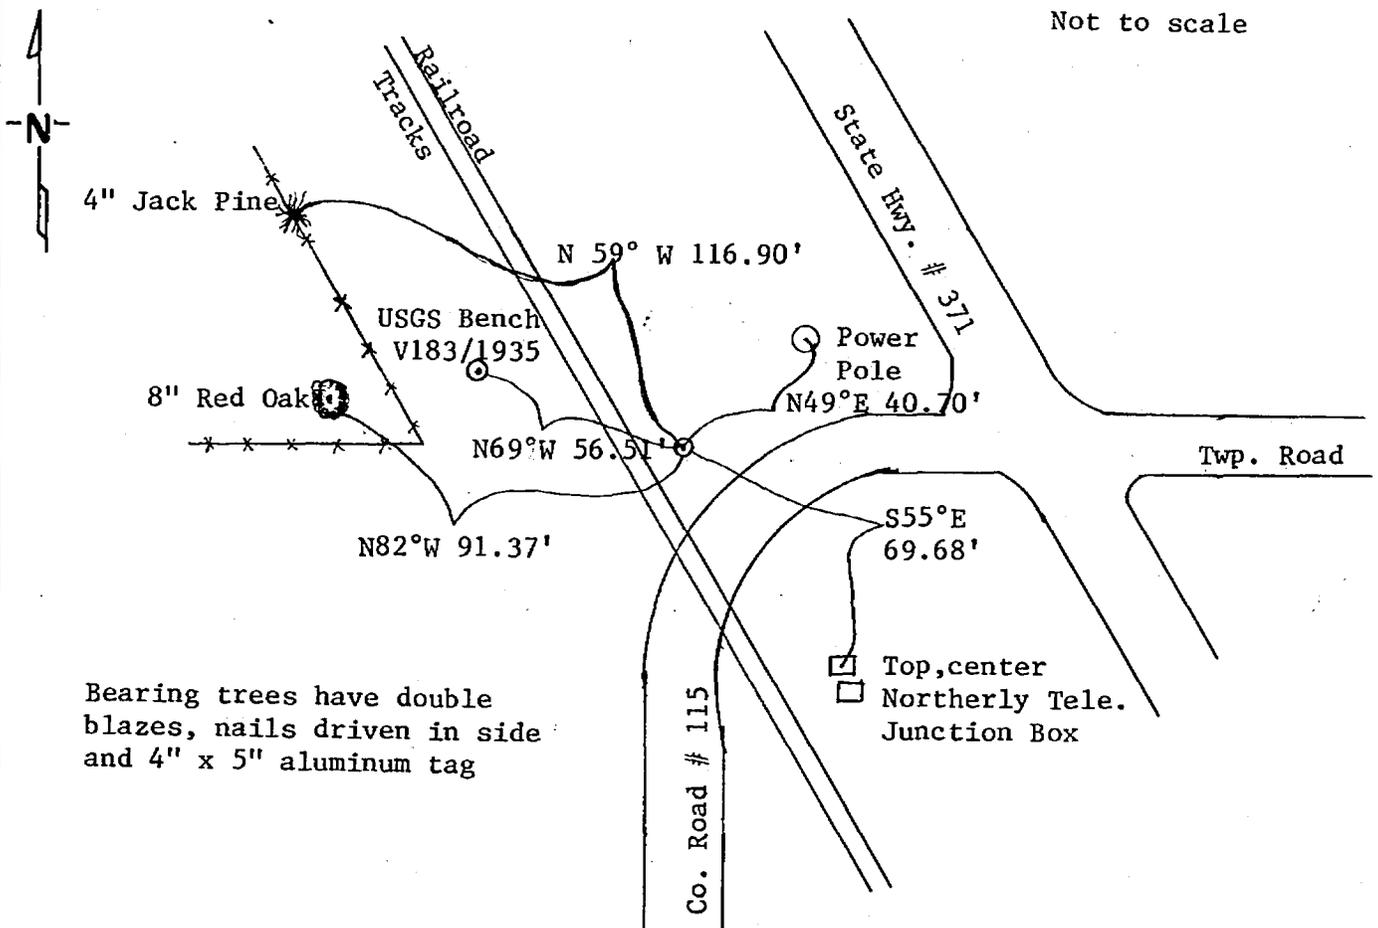

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Buro 5-6-85
SIGNATURE DATE

Registration No. 11395
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

281877
 OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 10:15 A.M. on the 13 day of May A.D., 1985

Register of Deeds Claudia Koyler County Recorder
 By ms, Deputy

DOCUMENT NO. 281877

- 1865 U.S. General Land Office Survey set a wood post for this corner and marked the following bearing trees: 7" Black Pine N53°E 40 lks., 10" Black Pine N72°W 36 lks., 9" Black Pine S62½°W 33 lks., 6" Black Pine S40°E 33 lks.
- 1907 County Survey Record Book "A", pages 318-328, show a survey by John Curo. He found the corner in place.
- 1922 C.J. Bark, Assistant Highway Engineer, found the corner and ties: Telephone Pole SE 52.1', Jack Pine West 62.9'. He set a 2" I.P. and 2x42" I.P.'s for ties NE, NW, SW & SE all 46.7'. He filed a Certificate of Location of Government Corner.
- 1941 County Survey Record Book "D", pages 266-267 show a survey by John Curo. He found a 2x48" I.P. and took the following bearings: 12" Jack Pine N28°48'E 201.30', 5" White Oak S46°25'E 113.90', 2" Pipe S45°W 46.85', 10" Jack Pine N11°02'W 219.75'
- 1983 On June 27, Survey Technician Terry Freeman and County Forester Dan Marcum, found the 2" I.P. 9' NE of easterly railroad track. They also found the 1922 2" I.P. NW 46.7'
- 1985 On March 22, Cass County Surveyor Walt Curo and Survey Technician Terry Freeman, marked new accessories: Power Pole N49°E 40.70', 4" Jack Pine N59°W 116.90', 8" Red Oak N82°W 91.37', USGS Bench Mark V/183/1935 N69°W 56.51' and top, center, northerly telephone junction box S55°E 69.68'. Pipe is inline with township road East and inline with centerline County Road #115 South.