

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 22, Township 144 N., Range 25 W., 5th P.M.



STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 12-10-1984 placed a 2 1/2" (O.D.) by 5 feet long Galvanized Iron Pipe with 3" Brass  
DATE  
Cap stamped as shown, up 1.50 feet.

5° EAST Declination

SKETCH OF REFERENCE TIES  
NOT TO SCALE

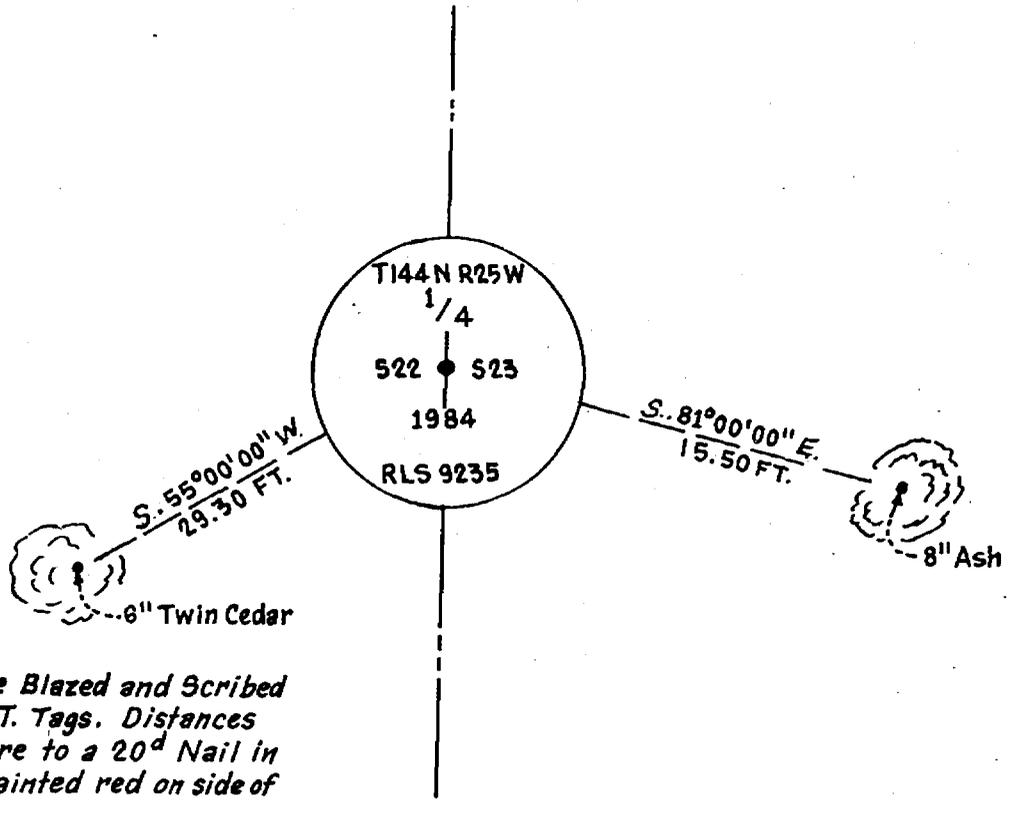

**NOTE:** Trees are Blazed and Scribed with B.T. Tags. Distances shown are to a 20<sup>d</sup> Nail in Notch painted red on side of Tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

James H. Parker 3/29/85  
SIGNATURE DATE

Registration No. 9235

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:35 A .M. on the 15 day of May A.D., 1985

County Recorder Claudia Kayler  
By MS, Deputy

DOCUMENT NO. 281952

Statement of Evidence:

P17

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 8" Balsam that bears N70°E a distance of 6 links [3.96 feet]  
A 5" Balsam that bears N88°W a distance of 13 links [8.58 feet]

On July 2, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail.

On December 10, 1984, an additional search was made by Advance prior to reestablishing this corner at its "lost" position half way and on line between adjacent section corners and as shown on the sketch.