

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

West 1/4 Corner of Section 30, Township 144N, Range 25W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9-27-1984 placed a 5/8" x 36" aluminum rod with 3" aluminum
DATE
cap stamped as shown. Down .30'

5° East declination

SKETCH OF REFERENCE TIES

Not to Scale

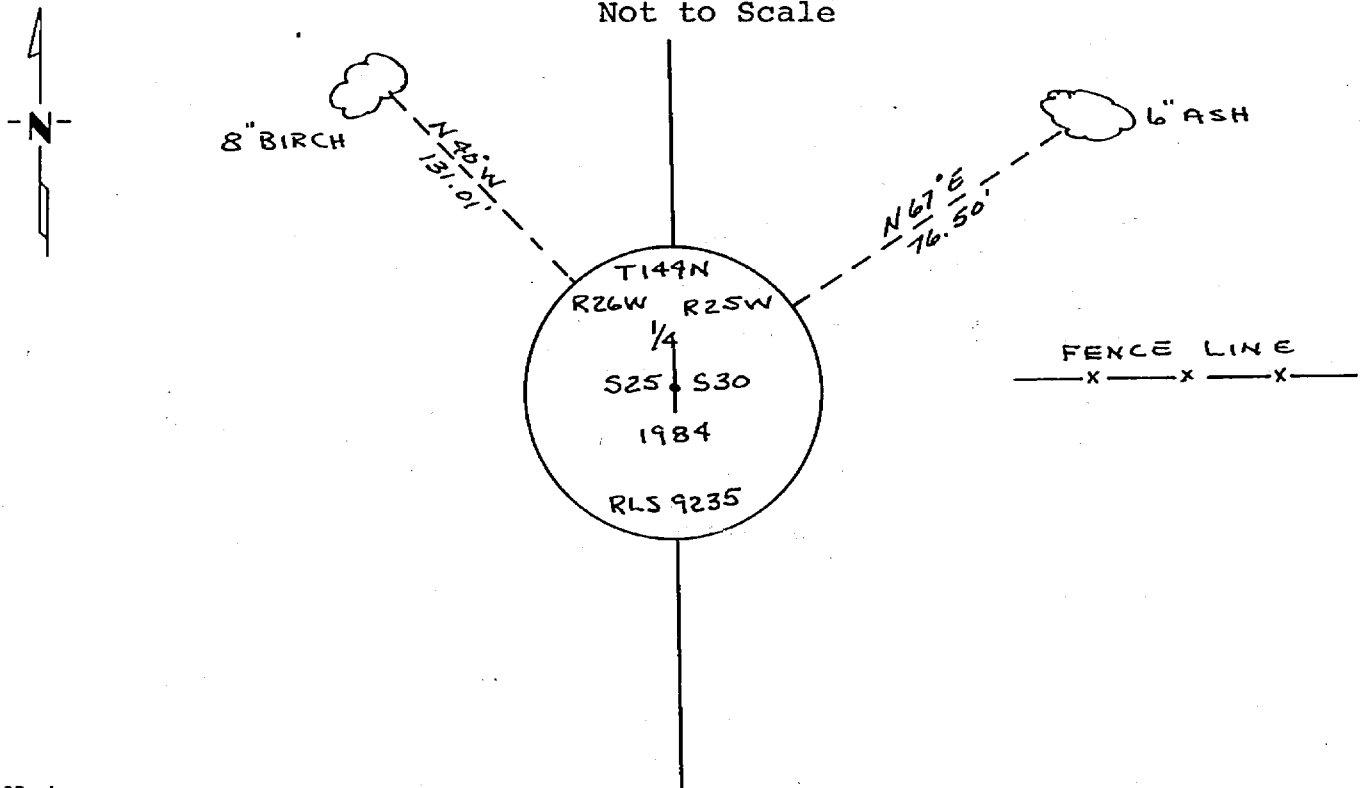

Note:

Trees are blazed & scribed with B.T. tags. Distances shown are to a 20^d nail in notch painted red on side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 4/24/85
SIGNATURE DATE

Registration No. 9235

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

281965

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:45 A.M. on the 15 day of May A.D., 19 85

County Recorder Candice Kayler

By ms, Deputy

DOCUMENT NO. 281965

Statement of Evidence:

T1

This corner was originally established in July 2, 1873, by P.H. Congar, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Congar's notes state that a post was set to mark the corner and referenced by the following:

A 12" Cedar that bears S68°W a distance of 13 links [8.58 feet]
A 5" Spruce that bears S59°E a distance of 8 links [5.28 feet]

In March, 1912, John W. Curo notes state that he found one of the Gov't bearing Trees plainly marked from which he set the corner and new references as follows:

A 12" Cedar that bears N52°30'E a distance of 42.25 feet
A 12" Ash that bears S70°26'E a distance of 54.20 feet
From County Survey Record Book " A ", pages 516 to 518.

On January 30, 1914, John W. Curo's notes state, corner in place and flagged up. This corner is on the centerline of new State Road No. 6. From County Survey Record Book " B ", pages 413 to 417.

On May 3, 1984, personnel from Advance Surveying & Engineering Company, search for this corner position which we determine from our field traverse, but to no avail.

On September 27, 1984, personnel from Advance Surveying & Engineering Company set a monument as shown on the sketch at the centerline of the County Road and the extension of the fence line from the East. This position is determined as obliterated.