

C E R T I F I C A T E O F L O C A T I O N O F G O V E R N M E N T C O R N E R

For the Southeast Corner of Section 17, Township 141 North, Range 25 West of the 5th Principal Meridian, STATE OF MINNESOTA, County of Cass.

On June 5, 1985, found a 2.5 inch (outside diameter) galvanized iron pipe with an iron pipe cap 3 inches in diameter, up 8 inches and stamped as shown in sketch. This monument is in good condition so we left it as found.

SKETCH OF REFERENCE TIES

(not to scale)

Top of page is NORTH

decl: 5° E


N 21° W, 11.50 feet to a 16d nail in the southwesterly face of a 5.7 inch diameter Aspen, double blazed and scribed "S17" and "BT".

6 foot long fiberglass post with a "Land Survey Monument" sticker attached.

6 foot long fiberglass post with "Land Survey Monument" sticker attached.

S 28° W, 9.60 feet to a 16d nail in the southwesterly face of a 6.6 inch diameter Aspen, double blazed and scribed "S20" and "BT".

S 3° E, 32.70 feet to a 16d nail in the westerly face of a 3.7 inch diameter White Birch, double blazed and scribed "S21" and "BT".

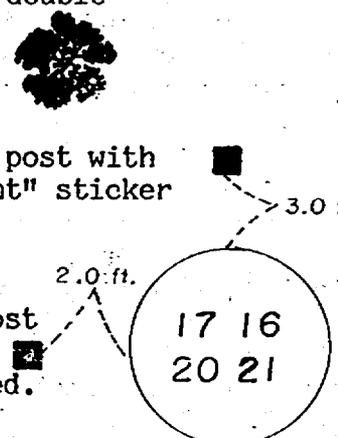

N 55° E, 25.90 feet to a 16d nail in the northwesterly face of a 6.8 inch diameter Aspen, double blaze and scribed "S16" and "BT".

All bearing trees are marked with red enamel, a USFS 54-3 "BEARING TREE TAG", and a 60d spike driven vertically into the base of the baseblaze.

Statement of evidence relative to this corner position is on the back.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Kenneth L. Whitehorn

 Kenneth L. Whitehorn

Date 9-24-85 Registration No. 14677

285571
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the office of the County Recorder this 6 day of Nov., 1985, at 9:40 AM. and assigned DOCUMENT NUMBER 285571.

Clondine Kayler

 County Recorder
 MS

STATEMENT OF EVIDENCE: Southeast Corner of Section 17, Township 141 North, Range 25 West, 5th Principal Meridian.

This corner was originally established by Edgar P. Putman and William P. Allen, Deputy Surveyors, in April of 1871. The record of that survey is on file in the Office of the Secretary of State, St. Paul, Minnesota. Their notes indicate that a post was set to mark the corner and referenced by: an 8 inch diameter Spruce that bears NORTH 73 degrees WEST, a distance of 14 links (9.24 feet); a 10 inch diameter Fir that bears SOUTH 30 degrees WEST, a distance of 16 links (10.56 feet); a 6 inch diameter Fir that bears SOUTH 32 degrees EAST, a distance of 52 links (34.32 feet); and a 7 inch diameter Birch that bears NORTH 55 degrees EAST, a distance of 21 links (13.86 feet).

On May 28, 1920, while traversing around Section 17 John Curo recovered an old post 3 foot long by 4 inches square and marked "S16 17 20-21". This post was referenced by an 8 inch diameter Spruce that bears NORTH 73 degrees WEST, a distance of 14 links (9.24 feet) with "BT" scribe visible; a Fir stump with "BT" scribe visible; a 7 inch diameter White Birch that bears NORTH 55 degrees EAST, a distance of 21 links (13.86 feet). This information is contained in the notes of John Curo, Hackensack, Minnesota.

John Curo returned to this corner on June 6, 1920, and set a 2.5 foot long by 3 inch diameter iron pipe with a cap stamped as shown on sketch, with two 60d spikes in the bottem of the pipe, and mounded with stone. He lists the same references as recovered on May 28, 1920. This information is contained in the notes of John Curo, Hackensack, Minnesota.

In the Supervisor's Office, Chippewa National Forest, Cass Lake, Minnesota, is a Forest Service form 874-9 by Raymond T. Defant dated January 23, 1940. It states that a 14 inch by 2.5 inch iron pipe was found in very good condition, referenced by a metal location poster on the northwest side of a 5 inch diameter Aspen, which bears NORTH 52 degrees WEST, a distance of 35 links (23.10 feet).

On June 5, 1985, a Forest Service survey crew recovered a 2.5 inch outside diameter galvanized iron pipe with a 3 inch diameter pipe cap stamped as shown on the sketch, 8 inches above the ground. A search was made for Original Survey evidence but none was found. This monument appears to be undisturbed and is the best perpetuation of the original corner position.

The Forest Service survey crew returned to this corner on July 1, 1985, and established new references as shown on the sketch. Records of this survey are on file with the USDA-Forest Service, Chippewa National Forest.