

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N Northwest Corner of Section 3, Township 140N, Range 26W, 5th P.M.
STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On 11-5-85 found a 2" Capped Iron Monument 4' long with
DATE
the top foot bent over at 90°
 left monument as found, lowered monument, removed monument (explain)
- On 11-11-85 placed a Cast Iron Monument marked
DATE
Section Corner

SKETCH OF REFERENCE TIES

Nails in sides of all Bearing Trees

Monument is located on the Southerly shoulder slope 26.25' Southerly of the Centerline of County Road #7. Monument Top at ground level.

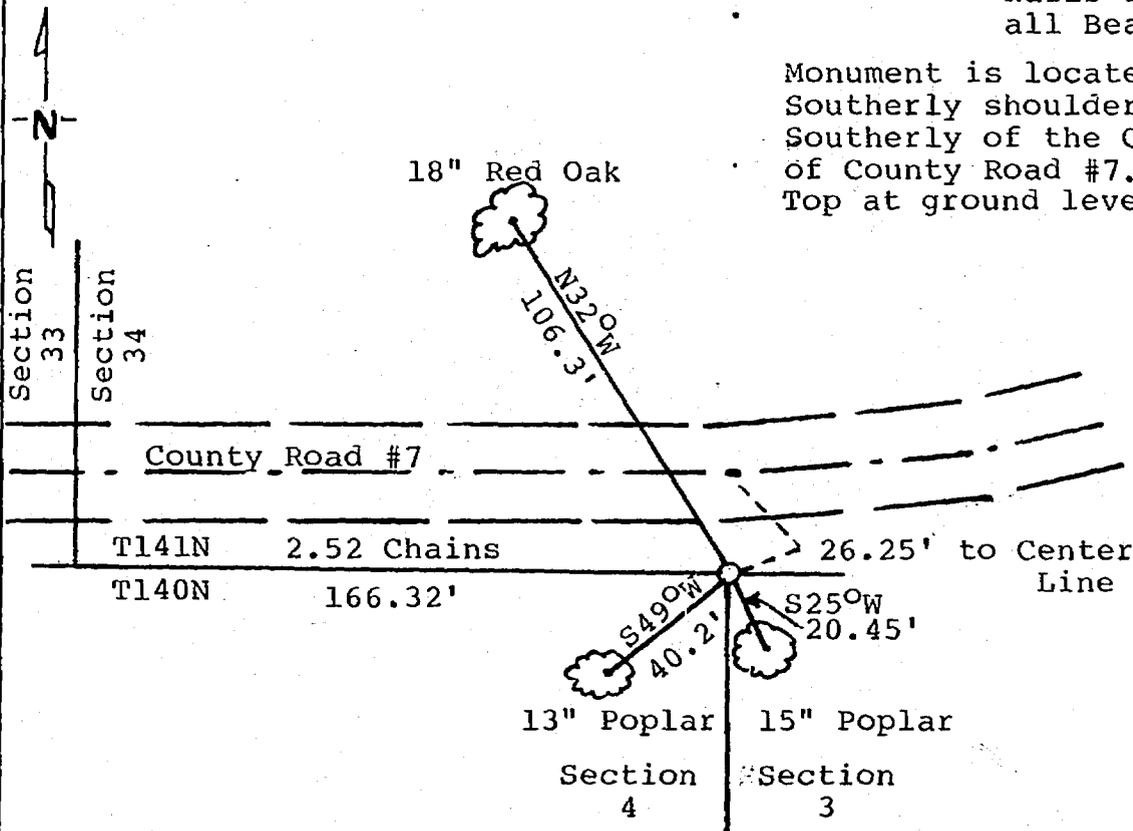

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ray A. Mustonen 2/12/85
SIGNATURE DATE

Registration No. 11946

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

286236
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:10 P.M. on the 9 day of Dec A.D., 1985

Register of Deeds Clodine Kayler
By MS, Deputy

DOCUMENT NO. 286236

STATEMENT OF EVIDENCE: Northwest Corner of Section 3, Township 140 North, Range 26 West of the 5th Principal Meridian.

1871 Walker, Allen & Putman, contract surveyors for the U.S. General Land Office set a post 2.52 chains East of the Southwest Corner of Section 34, Township 141 North, Range 26 West.

*

1977 Leo Witthoeft of the USFS found evidence of the corner and blazed and tagged 3 bearing trees.

1985 Roger A. Mustonen, RLS 11946, employed to survey part of Section 34 FOUND the 3 bearing trees and a 2" by 4" capped iron monument. The top foot being bent over at 90°.

On 11/11/85 dug to the bottom of the monument, removed same and placed a cast iron County Monument over the hole, checked the bearing tree ties and accepts same as being the Northwest Corner of Section 3.

* 1971 Don Coulter set a 1½" x 5' iron pipe form County Hwy. centerline tie. This position fits well with Bill Spain information- distance tie to NW corner Section 4.

Ties: 16" Red Oak N26°40'W 105.35'
10" Tw.R.Oak S64°40'E 72.7'
12" Quad R.Oak S17°50'E 52.5'
18" Red Oak S1°50'E 61.2'
12" Poplar S29°W 19.95'
10" Poplar S54°50'W 39.7' (old tie)