

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 15, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/19/85 found a 1 1/2" I.P. down 0.2', 4' south of centerline E-W road  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

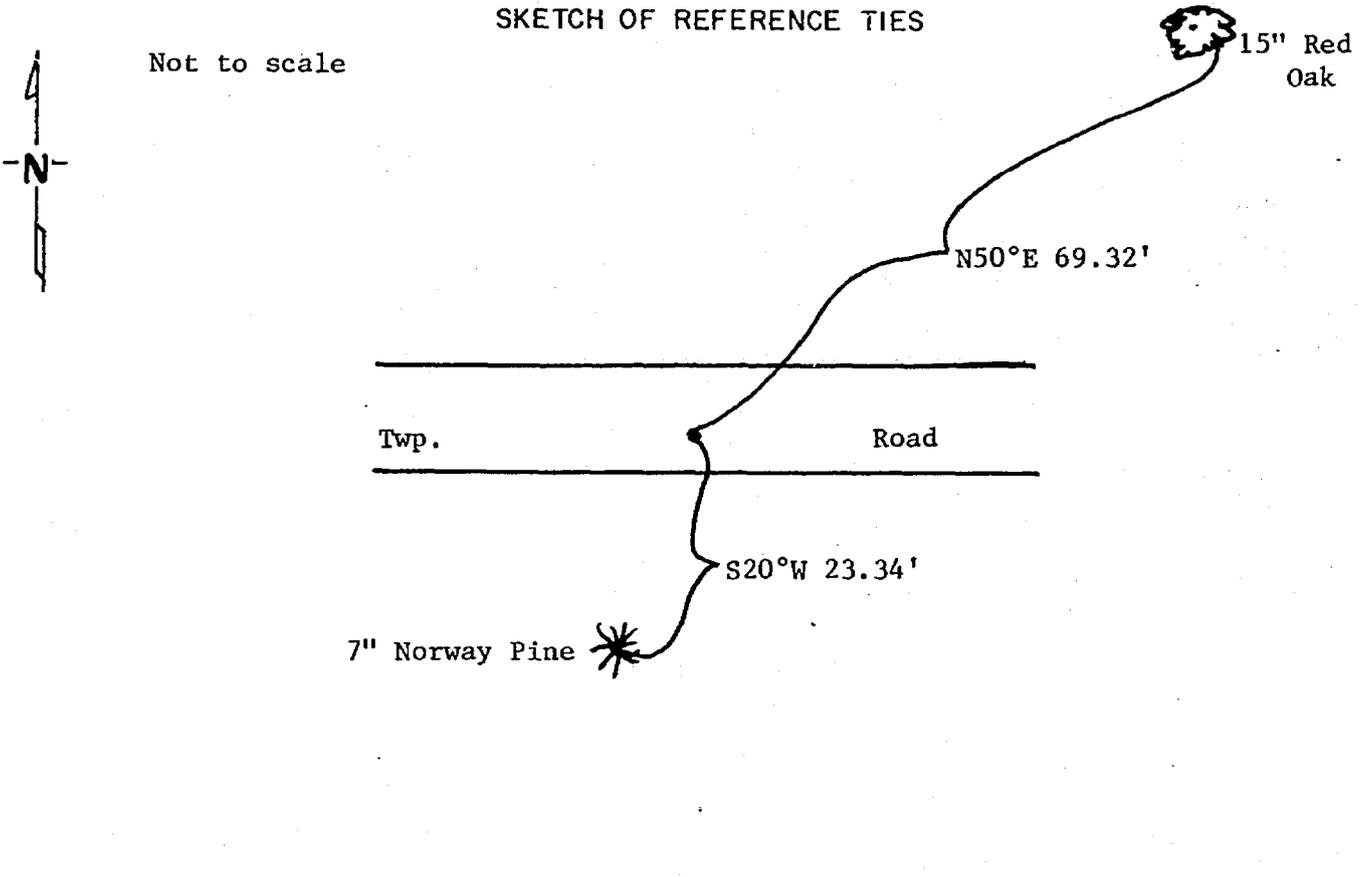

Bearings assumed using 5° declination  
Distances to nail on side of trees, trees are double blazed

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Linn 11-29-85  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

286 245  
OFFICE OF THE REGISTER OF DEEDS  
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:55 P.M. on the 9 day of Dec. A.D., 19 85

Register of Deeds Cloude Kayler  
By MS, Deputy

DOCUMENT NO. 286 245

STATEMENT OF EVIDENCE North Quarter Corner Section 15, T.135N., R.32W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 18" Y. Pine N68½°E 50 lks., 16" Y. Pine S8°E 55 lks.
- 1985 On Sept. 19, Terry Freeman, Cass County Survey Technician, and Ken Meyer, backhoe operator, found a 1½" I.P. down 0.2', 4' S. of centerline  
15" Red Oak N50°E 69.32'  
7" Norway Pine S20°W 23.34'
- 1985 On November 14, Terry Freeman and Walt Curo, Cass County Surveyor, visited the corner area and accept found iron as perpetuation of the corner.