


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 1, Township 135 N., Range 32 W., 5th P.M.  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/26/85 found a 2" capped ironpipe down 0.5', 2' W. of Centerline  
DATE  
N-S rd., 1' S. of centerline rd. East  
 left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

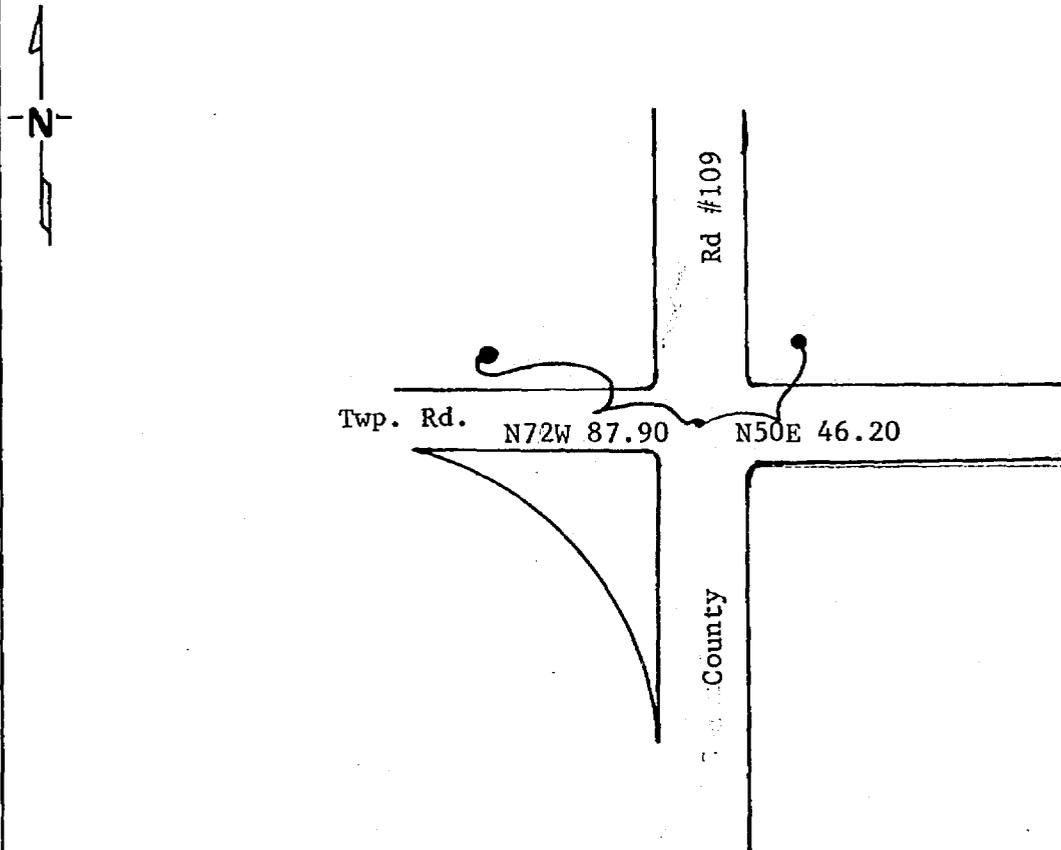

Not to scale      Bearings assumed using 5° declination

Statement of evidence relative to this corner location is on back of page. 286248

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walt E. Carr      11-29-85  
SIGNATURE      DATE

Registration No. 11395

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

#### OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:10 P. .M. on the 9 day of Dec. A.D., 1985

Register of Deeds Claudine Kaylor

By MS Deputy

DOCUMENT NO. 286248

STATEMENT OF EVIDENCE Northeast Corner Section 1, T.135N., R.32W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post and marked the following bearing trees: 9" Oak N 81 3/4°E 60 lks., 12" Oak N 57 3/4°W 23 lks., 13" Oak S 51 3/4°E 33 lks., 11" Aspen S 84 3/4°W 59 lks.
- 1916 County Survey Record Book "B" pages 247-257, show a survey by John Curo. He found a 4" square stone at PI roads E-W & S. 4" Poplar S 43°W 54.30', 6" Poplar S 52° E 47.00', 5" Poplar N 56°E 31.40'
- 1922 County Survey Record Book "D" page 279, shows a survey by E.B. Horst. He found a stone in center of road.
- 1922 County Survey Record Book "D" page 163, shows a survey by E.B. Horst. He found a stone in road.
- 1923 County Resurvey Plat by John Greene shows an iron monument.
- 1925 County Survey Record Book "D" page 180, shows a survey by John Greene. He set an iron monument. Telephone pole S 26°W 60', 6" Poplar N70° E 31', sign post S 47°W35.5', sign post N 60°W 25.6', 4" Poplar S 43°W54.3'
- 1941 State Highway Department found a 3" cap on an iron pipe.
- 1957 State Highway Department found iron pipe with cap. N & D in CFP NW 42.8', N & D in Power pole NE 45.9'
- 1985 On August 26, Cass County Survey Technician, Terry Freeman, found a 2" capped iron pipe down 0.5', 2' West of centerline N-S Rd, and 1' South of centerline rd East.
- 1985 On November 14, Walt Curo, County Surveyor and Terry Freeman visited corner. Accept capped iron in road as corner. Ties on other side of certificate are only bearings near.