

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 22, Township 138, Range 30, 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 6/17/85 found a 2 1/8" capped iron pipe 2 feet east of center ^{DATE} line and lowered it.
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

NO SCALE

SKETCH OF REFERENCE TIES

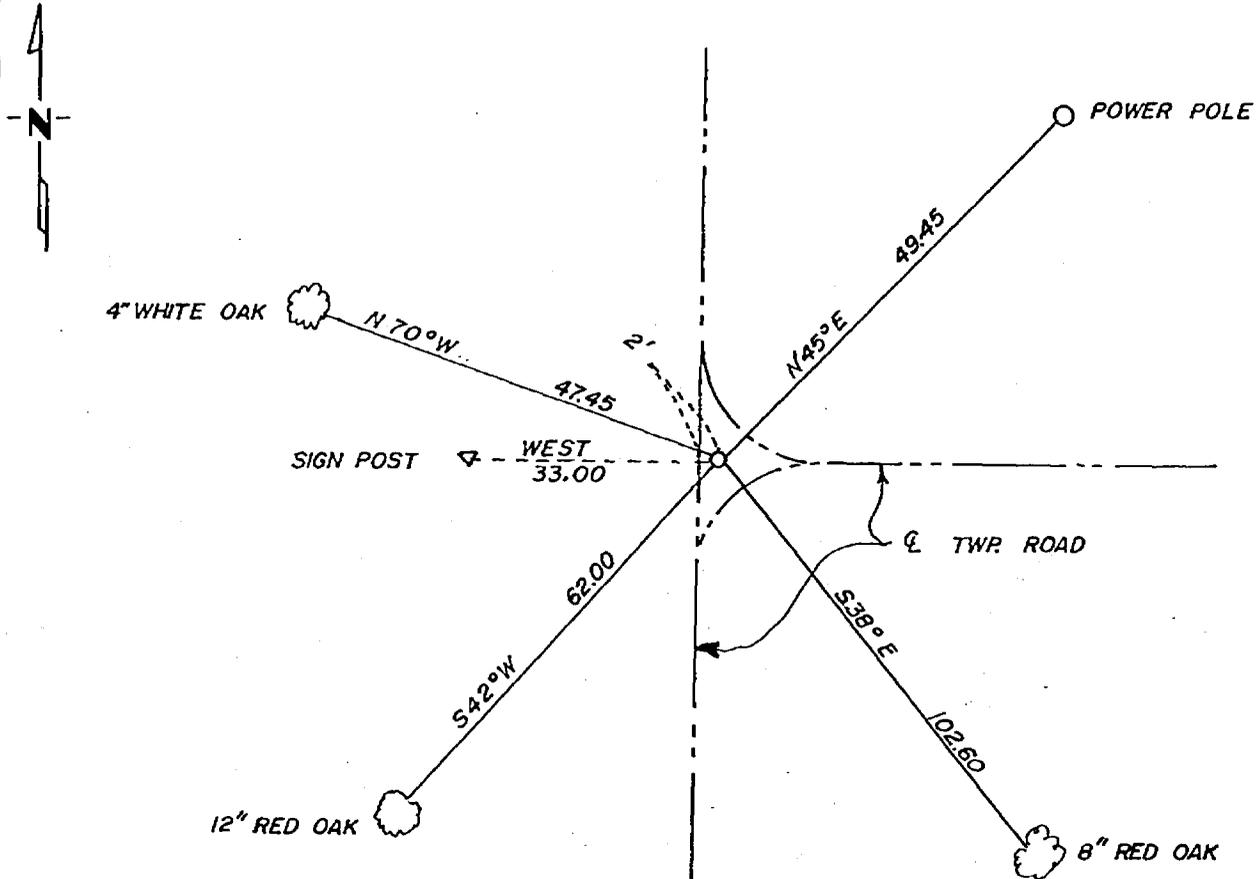

ALL MEASUREMENTS TO NAIL IN SIDE OF TREE.

Statement of evidence relative to this corner location is on back of page. 286249

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Brown 7-22-85
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:15 P. M. on the 9 day of Dec. A.D., 19 85

Register of Deeds Claudia Kayler

By MS, Deputy

DOCUMENT NO. 286249

Statement of Evidence: Northeast corner of section 22, T.131N., R.30W.

- 1865 Original survey set a wood post and marked the following BT's,
Bl. pine 7" N48½E, 19 lks.
" 8" N57W, 35 lks.
" 6" S48W, 24 lks.
" 8" S54E 33 lks.
- 1913 County record book B, page 289-300 shows that John Curo, RLS found the stumps of the 8" black pine S54E, 33 lks. from which he set a 2½"x48" galvanized pipe with cap in concrete and marked new BT's as follows:
Jackpine 10" S41-25W 47.77 feet
Jackpine 8" S56-28E 60.59 feet
- 1985 Walter Curo, RLS found the 2½" capped pipe, but found no evidence of any BT's. We mark new BT's as shown on the front. As the top is just below the surface of the road, we lower it 6 inches.