

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


For Angle Point 2 of Tract 1664 of Section 11, Township 141 North, Range 30 West of the 5th Principal Meridian, STATE OF MINNESOTA, County of Cass.

On April 20, 1983, to mark this corner position, we set a 2.5 inch (outside diameter) by 24 inch long galvanized iron pipe topped with a 3 inch diameter brass tablet, 1 inch below the road surface and stamped as shown in the sketch.

SKETCH OF REFERENCE TIES
(not to scale)

Top of Page is NORTH

decl: 5° E

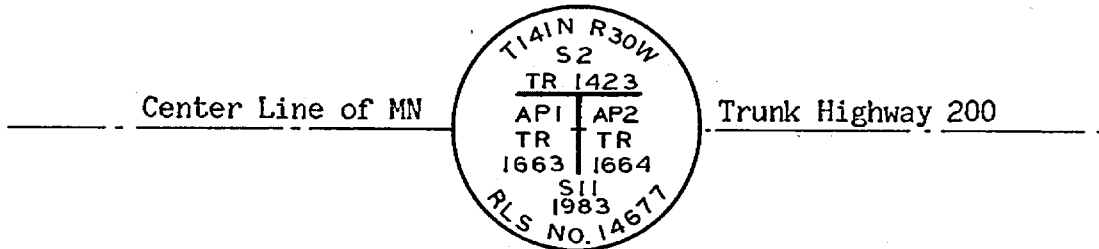

S 10° E, 80.10 feet to a nail on the side of a 10 inch diameter Red Oak, single blazed and scribed "AP2 S11 BT".

S 69° E, 165.10 feet to a nail on the side of a 10 inch diameter White Oak, single blazed and scribed "AP2 S11 BT".

S 33° E, 97.35 feet to a nail on the side of a 4 inch diameter Red Oak, single blazed and scribed "AP2 S11 BT".

All bearing trees are marked with red enamel, and a USFS 54-3 "BEARING TREE TAG".

Statement of evidence relative to this corner position is on the back.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Kenneth L. Whitehorn
Kenneth L. Whitehorn

Date FEB. 25 1986 Registration No. 14677

287748
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the office of the County Recorder this 14 day of March, 19 86, at 2:00 P.M. and assigned DOCUMENT NUMBER 287748 **MICROFILM.**

Claudine Kaylor
Claudine Kaylor, County Recorder
mj

STATEMENT OF EVIDENCE: Angle Point 2 of Tract 1664 of Section 11, Township 141 North, Range 30 West of the 5th Principal Meridian.

In 1917, Earl G. Harrington, U.S. Surveyor of the General Land Office, executed a dependent resurvey and subdivision of sections in this township under instructions in Group 2, Minnesota, issued September 11, 1917. He set a 1 inch diameter by 36 inch long iron post monument with a brass cap marked to identify the corner. No witnesses were established in this survey.

This corner position lies in Minnesota Trunk Highway Number 200 but the plans and notes on file with the Brainard Office of the Minnesota Department of Transportation contain no record of the recovery of this corner position.

Between February 23 and April 18, 1983 a traverse was run by the U.S. Forest Service on the North Line of Section 11. No evidence of the GLO iron was found and this position was determined lost.

On April 20, 1983, M. Hayes, C. Krause, G. Brama, and J. Allison, U.S. Forest Service; and T. Freeman, Cass County Surveyor's Office, established the monument and witnesses as shown on the front of this form. This corner position was re-established on line and at proportionate distance between the re-established North Quarter Corner of Section 11 and the re-established Northeast Corner of Section 11 (both by the U.S. Forest Service this same date).