

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

South One Sixteenth Corner of Section 11/12, Township 141 N., Range 29 W., 5th. P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6-6-86 placed a Brass Capped Monument Stamped 2 feet long
DATE 10" underground to top of Monument.

SKETCH OF REFERENCE TIES

All distances are to spikes in sides of trees. Forest Service tag 54-3 attached to trees. Bearings are Magnetic.

Monument Stamped
T.141N. R.29W.
S 1/16
S.11 S.12
1986
R.L.S. 11946

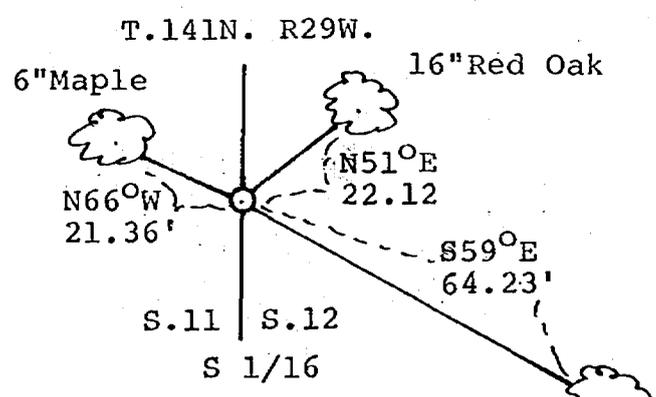

Monument is located in Centerline of woods trail which runs North-South. Clearcut area 50' Northerly.

15"White Oak
.1918
G.L.O. B.T.

Statement of evidence relative to this corner location is on back of page. 289501

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Roger A. Minton 6/6/86
SIGNATURE DATE

Registration No. 11946

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:20 A.M. on the 16 day of June A.D., 1986

County Recorder Claudia Kayser
By m.s., Deputy

DOCUMENT NO. 289501

Statement of Evidence:

South One-Sixteenth Corner between Sections 11 & 12, established in 1918 during the Reestablishment of a Portion of the Exterior and Subdivisional Line, Remarking of the Allotment Corners and other Surveys within Township 141 North, Range 29 West, by the U.S.G.L.O.

The corner was searched for in 1985 by Chippewa National Forest personnel, and was determined to be either obliterated or lost.

A survey made connecting the nearest identified corners on the line had a distance of 1307.58 feet (19.81¹⁸ chains). Compared to the G.L.O. call distance of 19.80 chains (1306.8 feet).

The survey made in June of 1986 reestablished the corner position by the single proportionate method, on line midway.

Note: From the monument set 6/6/86, a 15 inch White Oak identified as the 1918 G.L.O. tie tree, by blaze with visible scribing, bears southeast 64.23 feet. G.L.O. call was 98 lks (64.68 feet).

Survey equipment used was a Wild T2 Theodolite with EDM mounted, adjusted and calibrated in May of 1986.

All field notes, records and documents generated as a result of this survey are open to anyone willing to take the time to inquire about them for any reason, in the office of AMI SURVEYORS & MAPPERS
HCR 1 BOX 704, HACKENSACK, MINNESOTA 56452