

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North One-Sixteenth Corner of Section S 29 | 28, Township 142 N., Range 27 W., 5th. P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6-7-86 placed a Brass Capped Monument Stamped 2 feet long
DATE
10" underground, to top of Monument.

SKETCH OF REFERENCE TIES

Monument Stamped
T.142N.R.27W.
N1/16
S.29 S.28
1986
R.L.S. 11946

All distances are to spikes in sides of trees. Forest Service tag 54-3 attached to trees. Bearings are Magnetic.

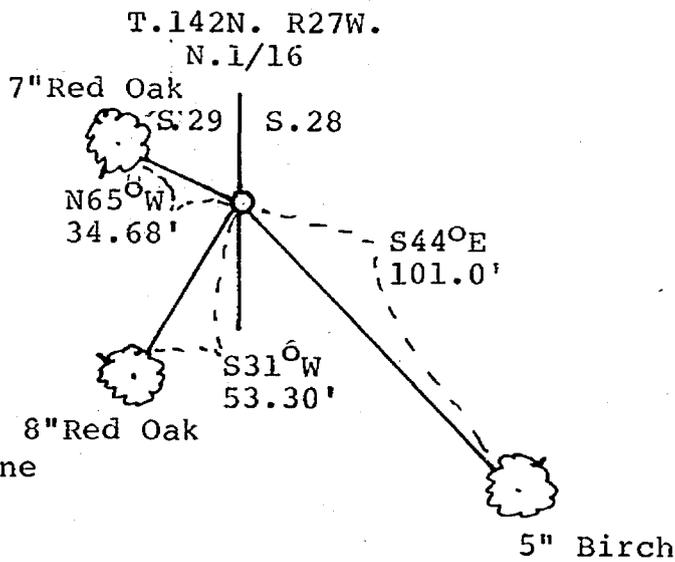

Monument is located
2' Westerly of Centerline
of Township Road in cut
area, 48' Southerly of
Forest Service trail
2550A. Set 60 Penny spike
on top of Monument.

Statement of evidence relative to this corner location is on back of page. 289502

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Roger A. Mustorn 6/7/86
SIGNATURE DATE

Registration No. 11946

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass
I hereby certify that this document was filed in the Co. Recorders office at 9:30 A.M. on the 16 day of June A.D., 19 86
County Recorder Claudine Kayler
By MS, Deputy

DOCUMENT NO. 289502

Statement of Evidence:

North One-Sixteenth Corner between Sections 29 & 28, established in 1919 during a U.S.G.L.O. Resurvey.

The corner was searched for in 1985 by Chippewa National Forest personnel, and was determined to be either obliterated or lost.

In May of 1986, we made a survey connecting the identified East Quarter Corner of Section 29 and the northeast corner of Section 29.

We reestablished the corner position by the single proportionate method, on line midway. Finding 1318.52 feet between corners.

The monument set 10 inches below grade in a cut of a north-south graded gravel road.

Survey equipment used was a Wild T2 Theodolite with EDM mounted, adjusted and calibrated in May of 1986.

All field notes, records and documents generated as a result of this survey are open to anyone willing to take the time to inquire about them for any reason, in the office of AMI SURVEYORS & MAPPERS
HCR 1 BOX 704, HACKENSACK, MINNESOTA 56452