

C E R T I F I C A T E O F L O C A T I O N O F G O V E R N M E N T C O R N E R

For the **East Quarter Corner** of Section 25, Township 143 North, Range 27 West of the 5th Principal Meridian, STATE OF MINNESOTA, County of Cass.

On April 11, 1986, to mark this corner position, we set a 2.5 inch (outside diameter) by 60 inch long galvanized iron pipe, with a polystyrene base containing an embedded magnetized pellet, and topped with a 3 inch diameter brass tablet, up 18 inches and stamped as shown in the sketch.

SKETCH OF REFERENCE TIES

Top of Page is NORTH


(not to scale)

decl: 5° E

N 57° W, 50.57 feet to a 16d nail in the northerly face of a 7.4 inch Red Maple, double blazed and scribed "1/4S25" and "BT".

N 14° E, 24.06 feet to a 16d nail in the westerly face of a 13.3 inch White Oak, double blazed and scribed "1/4S30" and "BT".

8 ft. long steel sign post with USFS 54-2 "PROPERTY BOUNDARY" and 54-9 "LAND SURVEY MONUMENT" signs attached.

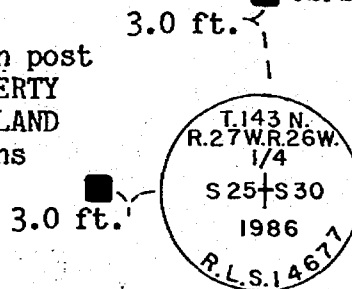

8 ft. long steel sign post with a USFS 54-2 "PROPERTY BOUNDARY" sign attached.

S 29° E, 53.36 feet to a 16d nail in the northeasterly face of a 10.1 inch White Oak, double blazed and scribed "1/4S30" and "BT".

All bearing trees are marked with red enamel, a USFS 54-3 "BEARING TREE TAG", and a 60d spike driven vertically into the base of the baseblaze.

Statement of evidence relative to this corner position is on the back.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Kenneth L. Whitehorn

Kenneth L. Whitehorn

Date JUN. 18 1986 Registration No. 14677

289688
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the office of the County Recorder this 24 day of June, 1986, at 10:45 A.M. and assigned DOCUMENT NUMBER 289688.

Claudine Kaylor
Claudine Kaylor, County Recorder

STATEMENT OF EVIDENCE: For the East Quarter Corner of Section 25, Township 143 North, Range 27 West of the 5th Principal Meridian.

This corner position was originally established on August 23, 1872, by Eli W. Griffin, Deputy Surveyor, under contract to the General Land Office, now the Bureau of Land Management (BLM). The record of this survey is on file in the Office of the Secretary of State, St. Paul, Minnesota, and indicates that Mr. Griffin set a wood post to mark this corner position. This record further indicates that Mr. Griffin referenced this corner position with: an 8 inch diameter White Pine that Bears SOUTH 84 degrees EAST, a distance of 14 links (9.24 feet); and an 8 inch diameter White Pine that bears SOUTH 40 degrees WEST, a distance of 20 links (13.20 feet).

No intervening record of corner visitation for this corner position was found and after an extensive search of the area failed to reveal any evidence of this corner position I determined, using single proportionate methods, the lost position and monumented and referenced that position as shown on the front of this document.