

**CERTIFICATE OF LOCATION OF GOVERNMENT CORNER**

For the East Quarter Corner of Section 17, Township 144 North, Range 29 West of the 5th Principal Meridian, STATE OF MINNESOTA, County of Cass.


On November 17, 1980, to mark this corner position, we set a 2.5 inch (outside diameter) by 60 inch long galvanized iron pipe topped with a 3 inch diameter brass tablet, up 18 inches and stamped as shown in the sketch.

**SKETCH OF REFERENCE TIES**

Top of Page is NORTH

(not to scale)

decl: 5° E

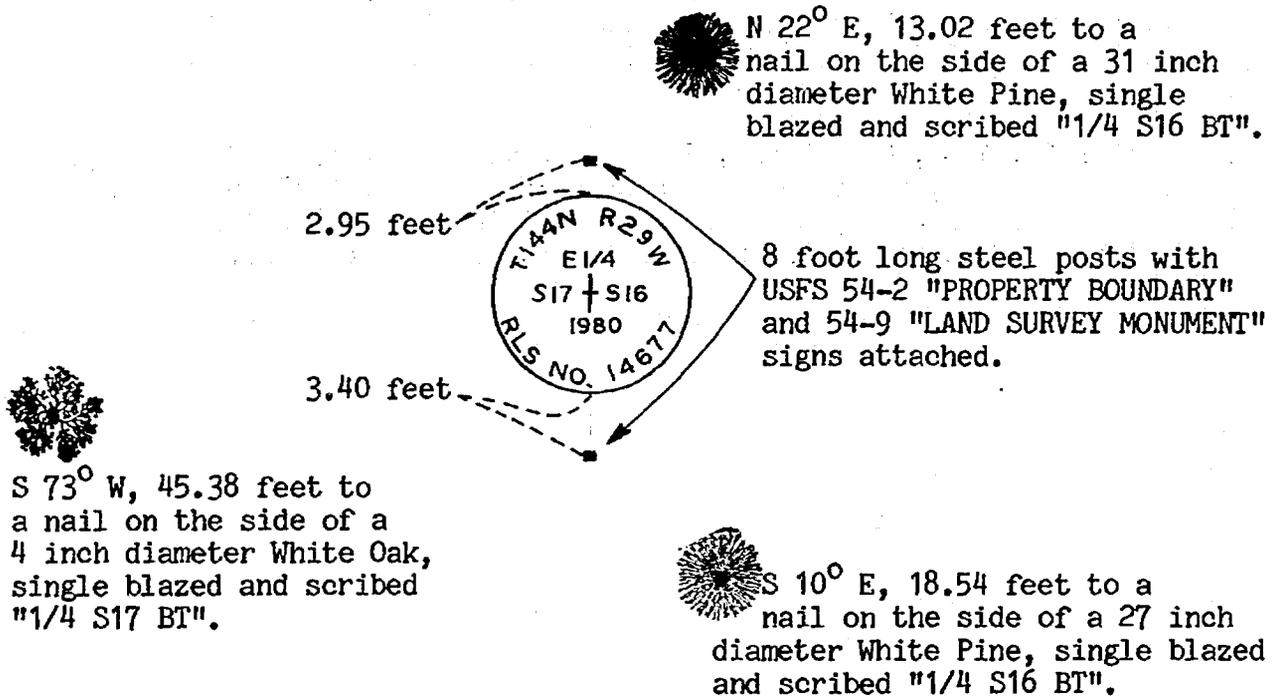

All bearing trees are marked with red enamel, and a USFS 54-3 "BEARING TREE TAG".

Statement of evidence relative to this corner position is on the back.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

*Kenneth L. Whitehorn*  
 Kenneth L. Whitehorn

Date July 3, 1986 Registration No. 14677

290148  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the office of the County Recorder this 16 day of July, 1986, at 9:30 A.M. and assigned DOCUMENT NUMBER 290148.

*Claudine Kaylor*  
 Claudine Kaylor, County Recorder  
 M.S.

**STATEMENT OF EVIDENCE:** For the East Quarter Corner of Section 17, Township 144 North, Range 29 West of the 5th Principal Meridian.

This corner was established by P. H. Conger, Deputy Surveyor under contract to the General Land Office (now the Bureau of Land Management). These notes dated October, 1873, are on file in the Office of the Secretary of State, St. Paul, Minnesota and indicate a post was set for the corner and was referenced by: a 3 inch diameter poplar that bears NORTH 71 degrees WEST a distance of 32 links (21.12 feet); an 8 inch diameter pine stub that bears SOUTH 38 degrees EAST a distance of 10 links (6.60 feet).

On October 24, 1974, Curt Krause, Lloyd Sobieck, USDA-Forest Service, determined a search area for this corner by compass and chain. At their search area they scraped the ground and found burned remains of a wood post in the ground. From these remains of the post they found an 8 inch diameter pine stub that bears SOUTH 38 degrees EAST a distance of 6.60 feet and remains of an Aspen stump that bears NORTH 71 degrees WEST a distance of 21.1 feet. The pine stub was found with a flat area, but no scribing was left. At the location of the burned remains of the post, a 3 inch by 3 inch by 6 foot high tamarack post was set to mark the corner position.

On November 17, 1980, Gary Brama, Jim Schoonover, Rob Main, and Dave Upgren, USDA-Forest Service, recovered the tamarack post set in 1974 and I feel this is the best evidence for perpetuation of the original corner position and set the monument and references as shown on the front of this document.