

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander _____ Corner of Section ³¹ 36, Township 143 N., Range ^{27 W.} 28 W., 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6-5-86 placed a 3/4" x 36' iron pipe with brass cap in
DATE
swamp on south shore of little boy river

SKETCH OF REFERENCE TIES

Not to scale

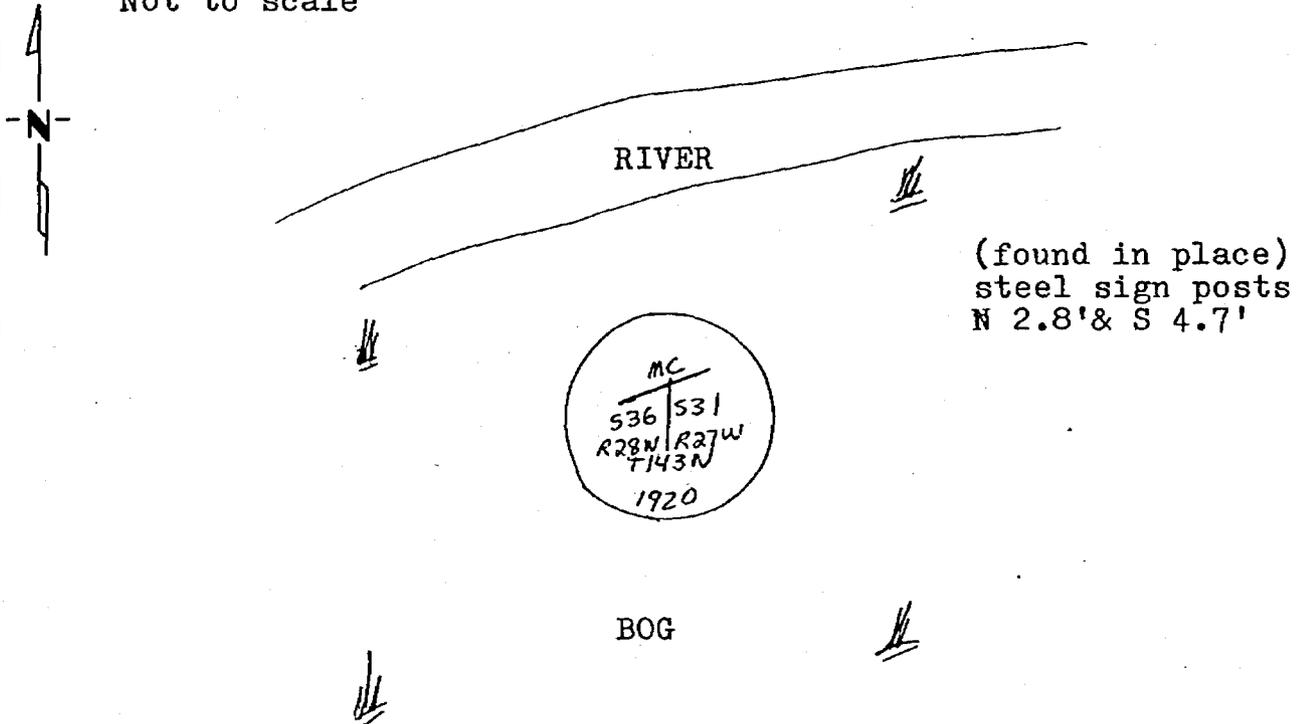

No trees available

Statement of evidence relative to this corner location is on back of page. 291490

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter P. Cass 9-4-86
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:50 P. .M. on the 5 day of Sept. A.D., 19 86

Register of Deeds Clouline Kaylor

By MS, Deputy

DOCUMENT NO. 291490

Statement of Evidence: Meander Corner Sections 36&31, T.143 N., Ranges 28&27
W. 5th P.M.

- 1873 U.S. General Land Office survey set a wood post for this corner and marked the following bearing tree: 8" Dead Tam. SOUTH 250lks.
- 1920 U.S. General Land Office dependent resurvey found a 3x3 stake and set a 1x36" I.P. with brass cap and marked the following bearing tree: 8" Dead Tam. S 47 3/4 W 159 lks.
- 1970 On May 18, Curt Krause, US Forest Service, found brass cap monument in good condition and also stump of 1920 BT at bearing & distance. On June 22, he set 5' steel sign posts as no trees were available. Sign post North 2.8' with USFS sign 54-2, sign post South 4.7' with USFS signs 54-2 & 54-4.
- 1985 On December 13, B. Ausk, US Forest Service, found steel sign posts north & south.
- 1986 On June 5, Walt Curo found GLO brass cap monument and USFS sign posts North and South. No trees available for ties.