

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 19, Township 145 N., Range 28 W., 5th P.M.



STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9-4-86 placed a 2" x 60" galv. iron pipe with brass cap and plastic base with embedded magnet, 18" above ground.
DATE

SKETCH OF REFERENCE TIES

Not to Scale

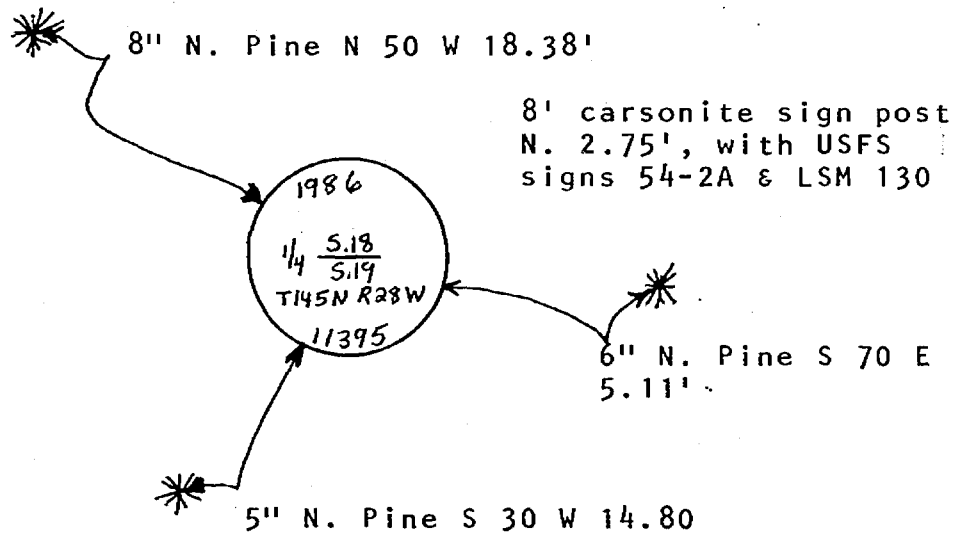

All measurements are to spks. in side of tree, trees are double blazed, scribed and painted red, with USFS 54-3 bearing tree tags attached.

Statement of evidence relative to this corner location is on back of page. 291631

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 9-12-86
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:40 A.M. on the 15 day of Sept. A.D., 1986

County Recorder Clondine Kayler
By MS, Deputy

DOCUMENT NO. 291631

Statement of Evidence: North Quarter Corner Section 19, T. 145 N., R. 28 W., 5th P.M.

- 1873 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 12" J. Pine N 67 E 34 lks.
- 1986 On September 4, Walter E. Curo, set corner at midpoint and on line between the Northwest and Northeast corners of Section 19. This area was cut over, stumps grubbed out and replanted 20-30 years ago. No evidence of corner is left. He set a 2" x 60" galv. iron pipe with brass cap, 18" above ground, with plastic base and embedded magnet. Marked the following bearing trees: 8" Norway Pine N 50 W 18.38' 6" Norway Pine S 70 E 5.11', 5" Norway Pine S 30 W 14.80', and placed a 8' carsonite sign post North 2.75' with USFS signs 54-2A and LSM 130.