

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


#12
 Meander _____ Corner of Section 5T4, Township 141N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 2-4-87 placed a 2" square tubular steel; aluminum
DATE
capped monument stamped

*Magnetic $4\frac{1}{2}^{\circ}$ E decl. SKETCH OF REFERENCE TIES
 Based on Solar
 Observatin 12-20-86

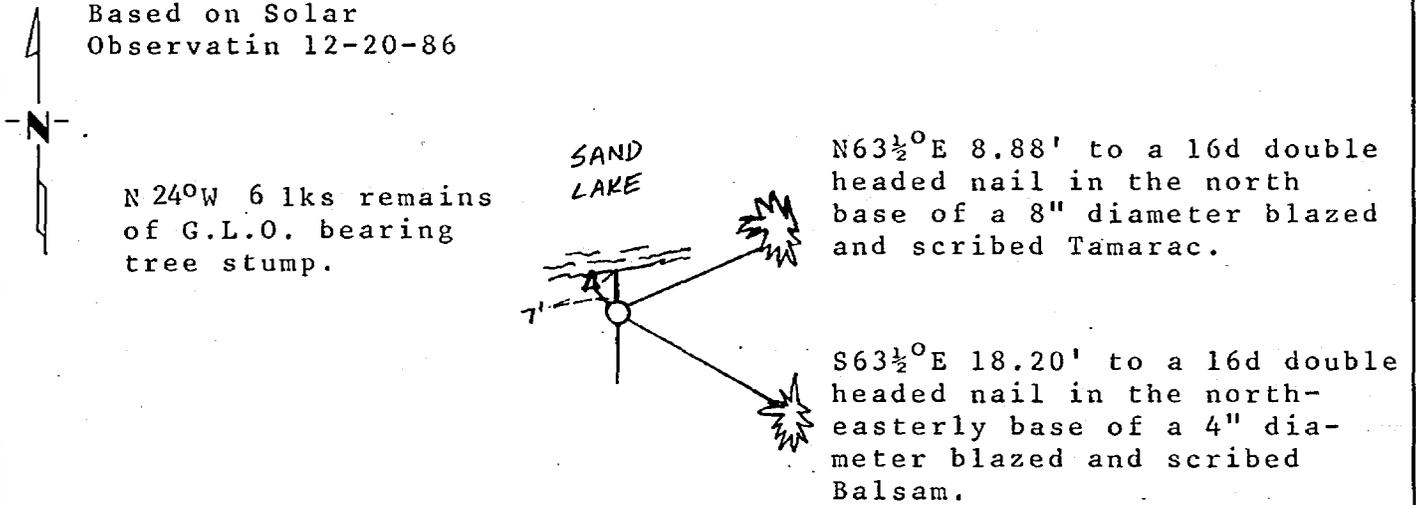

Monument is stamped

T141N R26W

MC
 S5 | S4
 1987
 RLS 11946

Monument is located

7' south of the waters edge of Sand Lake on a ice ridge Tag Elders southerly and westerly. County Surveyors Office sign and post west 1.0'.

Statement of evidence relative to this corner location is on back of page. 295217

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Roger M. Newton 2-23-87
SIGNATURE DATE

Registration No. 11946

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 1:30 P.M. on the 23 day of February A.D., 1987

County Recorder Clouline Kayler

By MS, Deputy

DOCUMENT NO. 295217

Statement of Evidence:

During April of 1871, Walker, Allen and Putnam, under contract with the U.S.G.L.O. surveyed and marked the East, North and West lines of Township 141 North, Range 26 West of the 5th Principal Meridian.

From May 1, to May 10, 1871, Walker, Allen and Putnam surveyed and marked the interior lines of the Township.

February 4, 1987, Roger A. Mustonen, RLS #11946, along with Cass County Surveyors office representative, find the remains of the original G.L.O. Spruce bearing tree stump. We dug a hole about 18 inches in diameter and 16 inches deep, in the near vicinity of the called for G.L.O. Meander Corner. At about 8" to 10" deep we find rotted oak wood standing vertical. At about 11" to 13" we find bits of charcoal. Marking the location, we find it fits the G.L.O. bearing tree stump for bearing and distance, and it also fits the called distance from the southwest corner of Section 4. We set a Cass County Monument to perpetuate the corner position.

Original G.L.O. survey set a wood post, from which:
Spruce 6" S50W 8 links
Fir 8" S37E 14 links