

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 9, Township 141N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 11-4-86 found a 1" Iron Rod 21" long.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12-22-86 placed a 2" U.S.F.S. Iron Pipe with Brass Cap,
DATE
stamped to identify corner.


*Magnetic: $4\frac{1}{2}^{\circ}$ E. decl. SKETCH OF REFERENCE TIES.

Based on Solar
Observation 12-20-86



N $48\frac{1}{2}^{\circ}$ W 29.42' to a
16d double headed
nail in the north-
easterly base of a
5 $\frac{1}{2}$ " diameter blaz-
ed and scribed Popple
Popple.

N $57\frac{1}{2}^{\circ}$ E 53.66' to a 20d
nail in the northwesterly
base of a 14" diameter
blazed and scribed Red
Oak.

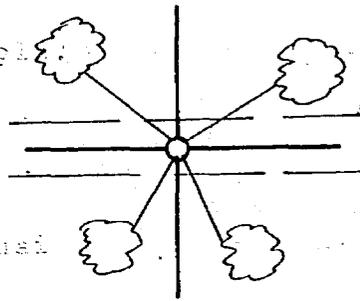

S $31\frac{1}{2}^{\circ}$ W 28.51' to a
16d double headed
nail in the west
base of a 5" dia-
meter blazed and
scribed Popple.

S $20\frac{1}{2}^{\circ}$ E 25.45' to a 16d
double headed nail in the
westerly base of a 5 $\frac{1}{2}$ "
diameter blazed and
scribed Popple.

Monument is stamped

T141N R26W
S4 | S3
S9 | S10
1986
RLS 11946

Monument is located
on a slight easterly slope,
in the centerline of old
ditched road running east-west,
snowmobile trail southerly,
old field northwesterly, 60'
north of Spruce plantation
southerly, and 397' west of
Forest Service road #2069
centerline. Post & sign south 81.0'

Statement of evidence relative to this corner location is on back of page. 295220

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Roger Arnst

Date 2-23-87 Registration No. 11946

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 1:50 P .M. on the 23 day of February A.D., 1987

County Recorder Claudine Kayler

By MS, Deputy

DOCUMENT NO. 295220

Statement of Evidence:

During April 1871, Walker, Allen and Putnam, under contract with the U.S.G.L.O., surveyed and marked the East, North and West lines of Township 141 North, Range 26 West of the 5th P.M.

During May of 1871, Walker, Allen and Putnam, Contract Surveyors, survey and marked the interior line of the Township.

During the 1960's, according to local landowners, surveys were made in part of Section 4, for the purpose of laying out lots and marking boundary lines, by unknown surveyors.

In 1959, 1975 and 1986, Forest Service personell searched for this corner. But, no evidence found. However, in 1975 a measurement of 5280 feet west from the southeast corner of Section 3, recovered by County Surveyor J. Flynn, was made and a spike was set at the approximate corner.

On November 4, 1986, Roger A. Mustonen, RLS #11946, under contract with the USDA Forest Service, found a 1" iron rod monument approximately 16 feet west of the Forest Service spike, and accepts this monument as marking the southeast corner of Section 4, and on December 22, 1986 replaced it with a USDA forest Service monument. (See other side for ties, etc.)

Original G.L.O. survey set a wood post, from which:

Birch 10" S20°W 58 lks

Basswood 10" S54°E 44 lks

Elm 6" N76°E 17 lks

Maple 8" N18°W 39 lks.

No evidence of G.L.O. bearing trees found.