

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 18, Township 140, Range 26, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-25-83 found a 1 1/2" iron pipe at corner with one stump of 1871  
DATE  
GLO bearing tree.  
 left monument as found,  lowered monument,  removed monument (explain)
- On 10-25-83 placed a county cast iron monument  
DATE

### SKETCH OF REFERENCE TIES

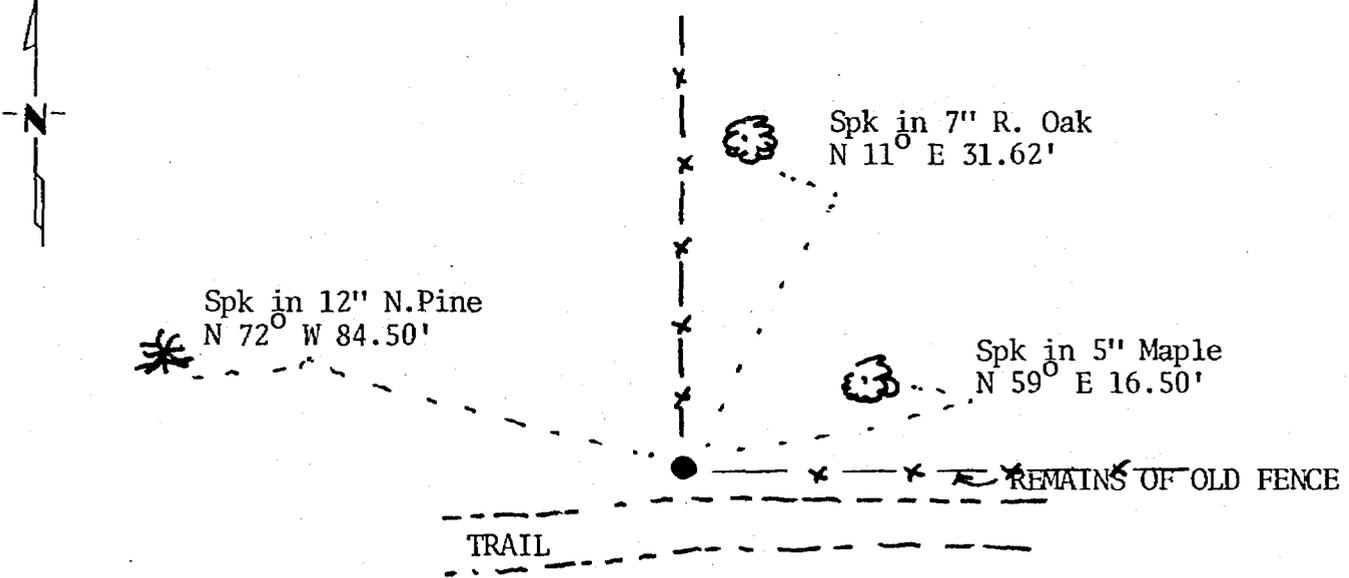

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page. 295286

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Gay H. Steen 2/7/87  
SIGNATURE DATE

Registration No. 12684

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:50 P.M. on the 25 day of February A.D., 1987

County Recorder Claudia Kayler  
 By MJ Deputy

DOCUMENT NO. 295286

Statement of Evidence:

- 1871 - U.S. General Land Office survey set wood post with bearing trees marked:  
10" Norway Pine N 39° E 18 links (11.88')  
10" Norway Pine S 51° W 42 links (27.72')  
8" Birch N 33° W 12 links (7.92')  
8" Oak S 17° E 50 links (33.0')
- 1910 - County Surveyor's Record Book A pages 312 show survey by *John Cwo.* Survey shows wood stake set from stumps of SE and SW bearing trees.
- 1938 - CCC notes at DNR Washburn Lake Forestry Station show scribed stake and 2" iron pipe found at the corner with ties: 8" Aspen S 64° E 12.7'
- 1966 - R.F. Schneider, RLS # 5740, found 1½" galvanized pipe in place with 12" Norway Pine stump NW 11.5', which had bottom blaze mark. Corner is at intersection of old fence lines north and east.
- 1983 - Replaced iron pipe with county cast iron monument and took ties as shown on this Certificate. Remains of NW GLO BT still evident.