


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Corner to Meander Corner of Sections 19 & 24 Township 142N, Range 30W/31W, 5th P.M.
 (South Shores of Narrows)
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 9/26/86 found a G.L.O. brass capped iron monument, 3 feet long, 1 inch in diameter, cap .5 feet above ground.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

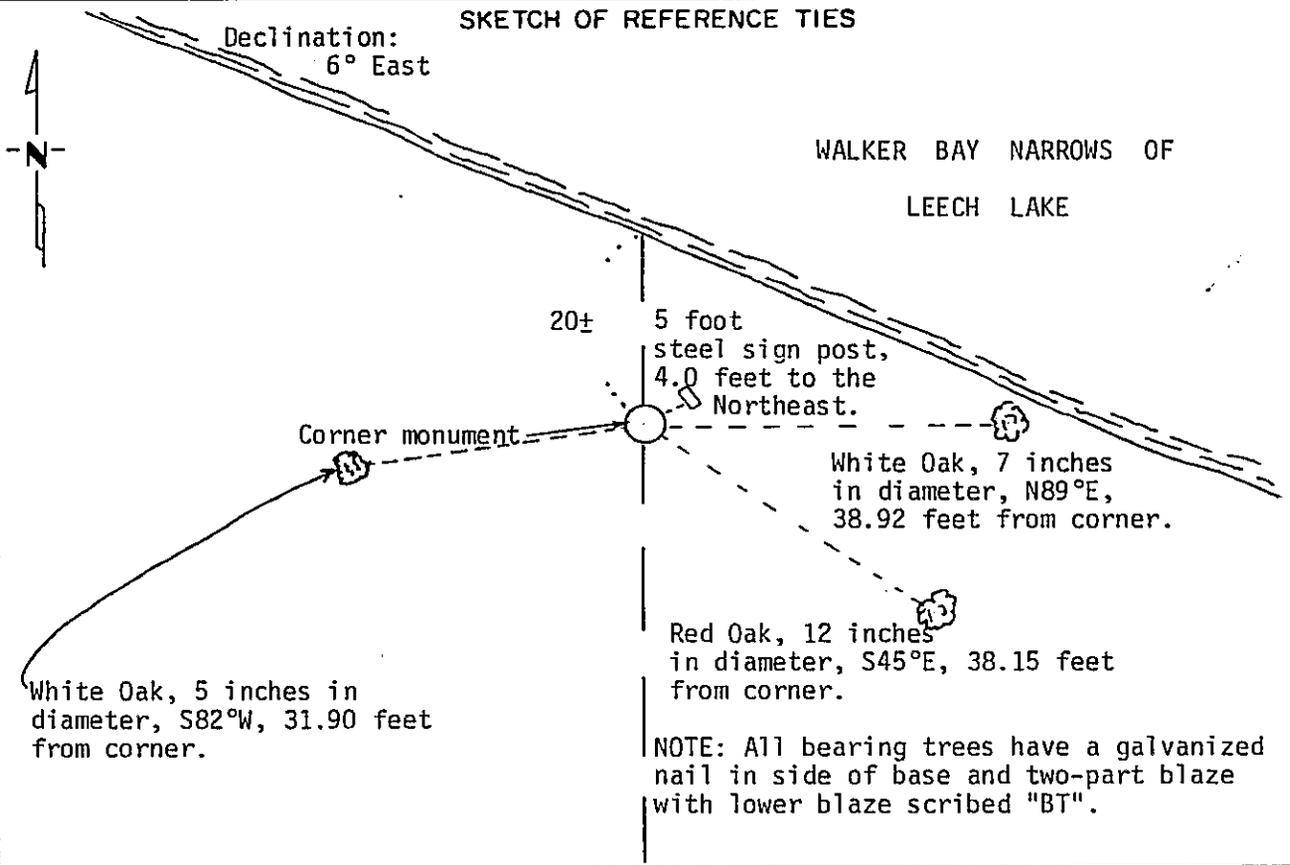

NOTE: All bearing trees have a galvanized nail in side of base and two-part blaze with lower blaze scribed "BT".

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Robert W. Murray 12-1-86
SIGNATURE DATE

Registration No. 15483

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 11:30 A. .M. on the 22 day of May A.D., 19 87

Register of Deeds Claudia Kayler
 By _____, Deputy

DOCUMENT NO. 296970

Statement of Evidence: Witness Corner to Meander Corner Between Sections 19 and 24
T. 142 N., R. 30 and 31 W., 5th P.M.

- 1873 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 5" White Oak, S.49°E. 19 links (12.54 feet), 6" White Oak, S.35°W. 27 links (17.82 feet).
- 1917 General Land Office set a 1" x 36" iron pipe with brass cap for a Witness Corner to the Meander Corner. The original bearing trees were both found and the position of the Meander Corner fell on the beach. New references to the Witness Corner set were as follows: 5" White Oak, S.72½°E. 96 links (63.36 feet), 10" White Oak S.68°45'W. 64 links (42.24 feet).
- 1986 On September 26, Robert W. Murray, R.L.S., found G.L.O. brass cap monument in good condition. Both G.L.O. bearing trees were gone. Location of W.C.M.C. fit distance north from found East Quarter Corner. New references were made as indicated on sketch.