

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 24, Township 142N, Range 31W, 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 9/26/86 found a G.L.O. brass capped iron monument, 3 feet long, 1 inch
DATE
in diameter, under 1 foot of swamp mud.
 - left monument as found, lowered monument, removed monument (explain)
- On 9/26/86 ~~xpopped~~ raised corner monument so that cap is .5 feet above
DATE
swamp.

Declination: 6° East

SKETCH OF REFERENCE TIES

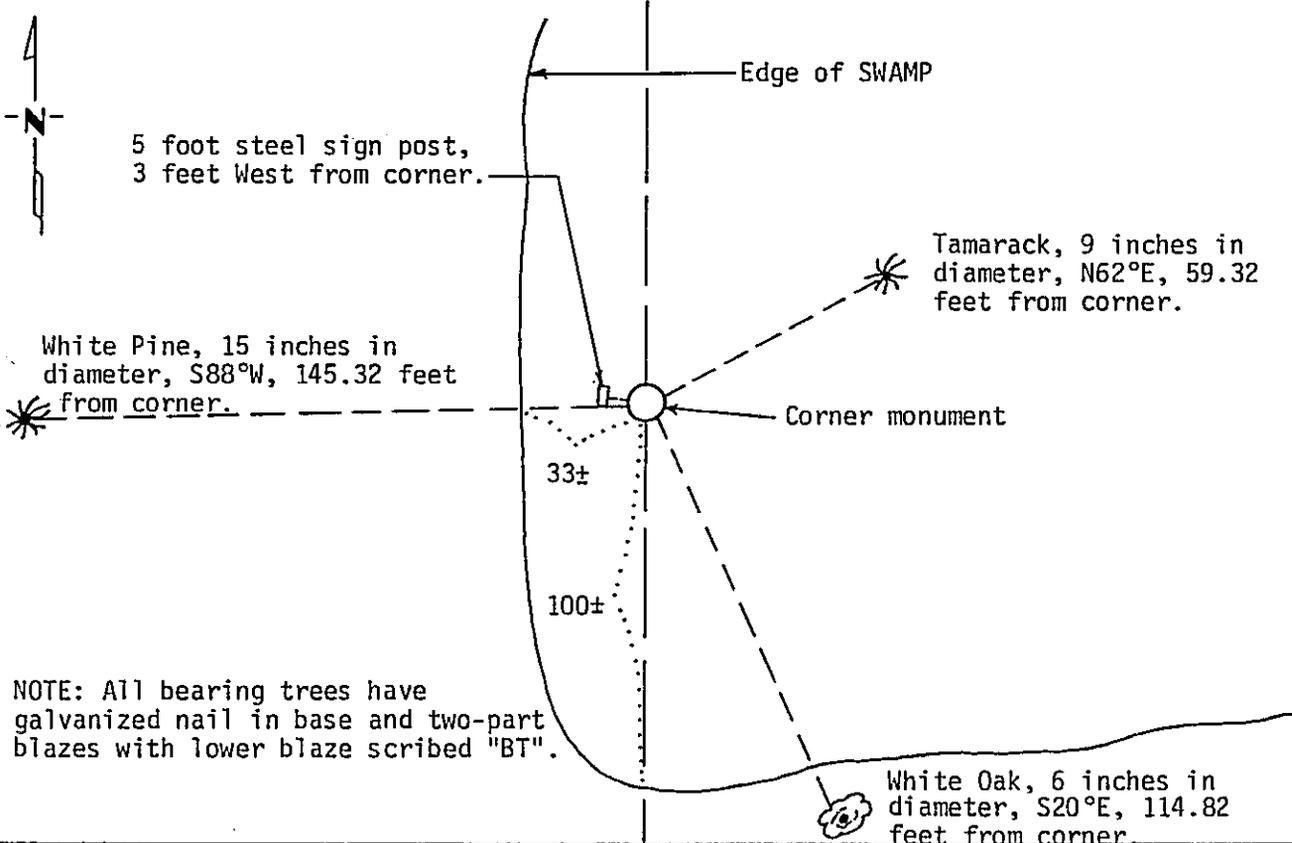

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Robert W. Murray 12-1-86
SIGNATURE DATE

Registration No. 15483

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 11:40 A. .M. on the 22 day of May A.D., 19 87

Register of Deeds Claudine Kayler

By _____, Deputy

DOCUMENT NO. 296971

Statement of Evidence: East Quarter Corner Section 24, T.142 N., R.31 W., 5th P.M.

- 1873 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 14" Jack Pine, N.11^oE. 55 links (36.30 feet), 8" Yellow Pine, N.3^oW., 66 links (43.56 feet).
- 1917 General Land Office set a 1" x 36" iron pipe with brass cap at a proportional distance between found original Meander Corner positions. No original evidence was found. New references were made as follows: 10" Oak, S16^oE. 2chains (132.00 feet), 12" Pine, S.69^oW., 292 links (192.72 feet).
- 1986 On September 26, Robert W. Murray, R.L.S., found G.L.O. brass cap monument and G.L.O. Oak bearing tree in good condition. New references were made as indicated on sketch.