


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 4, Township 135 N., Range 32 W., 5th
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/11/86 placed a cast iron monument, down 1.0', in centerline of road and fence South.
DATE

SKETCH OF REFERENCE TIES

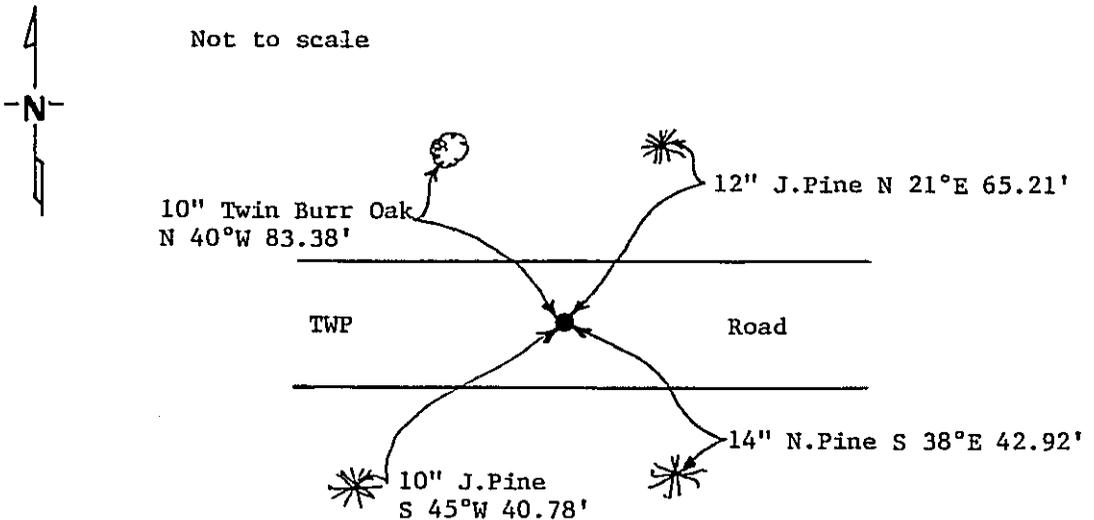

Measurements are to nail in side of tree.
Bearings assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 29716

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter C. Ross 1-22-87
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:15 A. .M. on 1 day of June A.D.,

Register of Deeds Clouline Ka
By m

DOCUMENT NO. 297162

STATEMENT OF EVIDENCE Northeast Corner Section 4, T.135 N., R.32 W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 16" Y.Pine N 74°E 238 lks., 16" Y.Pine N 67°W 120 lks., 16" Y.Pine S 7°E 99 lks., 14" Y.Pine S 59°W 80 lks.
- 1985 On August 26, Terry Freeman, Cass County Survey Technician, searched with metal locator in area of E-W road and fence South.
- 1985 On Sept. 17, Terry Freeman and Ken Meyer, backhoe operator, dug 12' E-W x 10' N-S x 3' deep. Found nothing. Slight cut in area, dug 3' into sand.
- 1986 On August 11, Terry Freeman and Dan Gordon, set cast iron monument in centerline of E-W road and fence south, down 1' and marked the bearings trees as shown on front of this certificate.