

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 3, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:


On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 8/11/86 placed a cast iron monument down 0.8'
DATE

SKETCH OF REFERENCE TIES

Not to scale

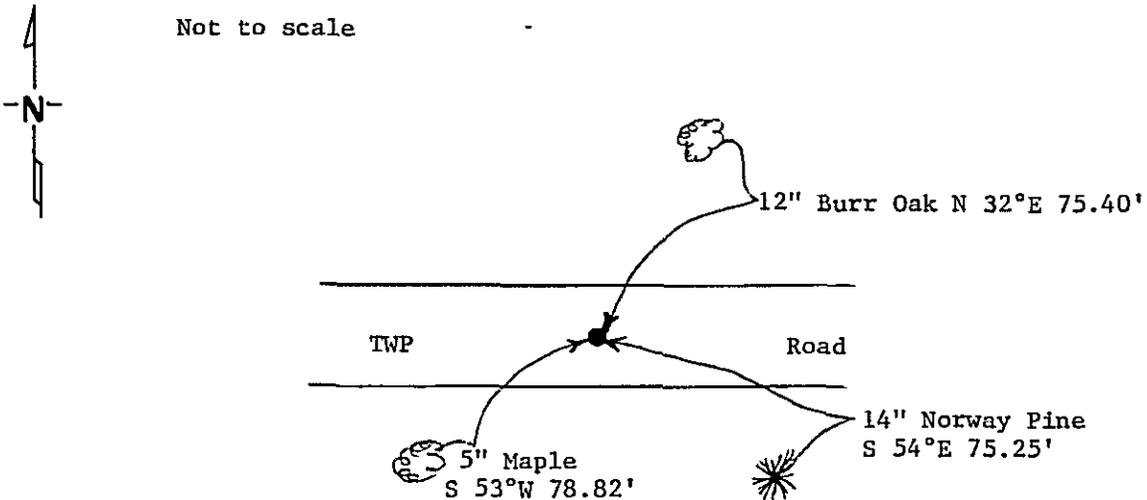

All measurements are to nail in side of tree.
Bearings are assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297163

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Carr 1-22-87
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:20 A.M. on the 1 day of June A.D., 19 87

Register of Deeds Clouline Kayler

By MS, Deputy

DOCUMENT NO. 297163

STATEMENT OF EVIDENCE North Quarter Corner Section 3, T.135 N., R.32 W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 24" Y. Pine N 69°E 174 lks., 18" Y. Pine N 64°W 57 lks.
- 1985 On August 26, Terry Freeman, Cass County Survey Technician, searched in area of E-W road and fence south with metal locator. There is a cut in this area.
- 1985 On Sept. 17, Terry Freeman and Ken Meyer, backhoe operator, dug 8' N-S x 10' E-W x 3.5' deep. Digging consisted of 6" class V, 1.5' fill and dug 1.5' into natural sandy gravel & clay. Found nothing.
- 1986 On August 11, Terry Freeman and Dan Gordon, set a cast iron monument in centerline of E-W road and fence South.