


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 25, Township 135 N., Range 32 W., 5th P.M.  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 8/26/86 placed a cast iron monument 41.5' W. of centerline of State  
DATE  
Hwy # 64 from Hwy Depr. information.

## SKETCH OF REFERENCE TIES

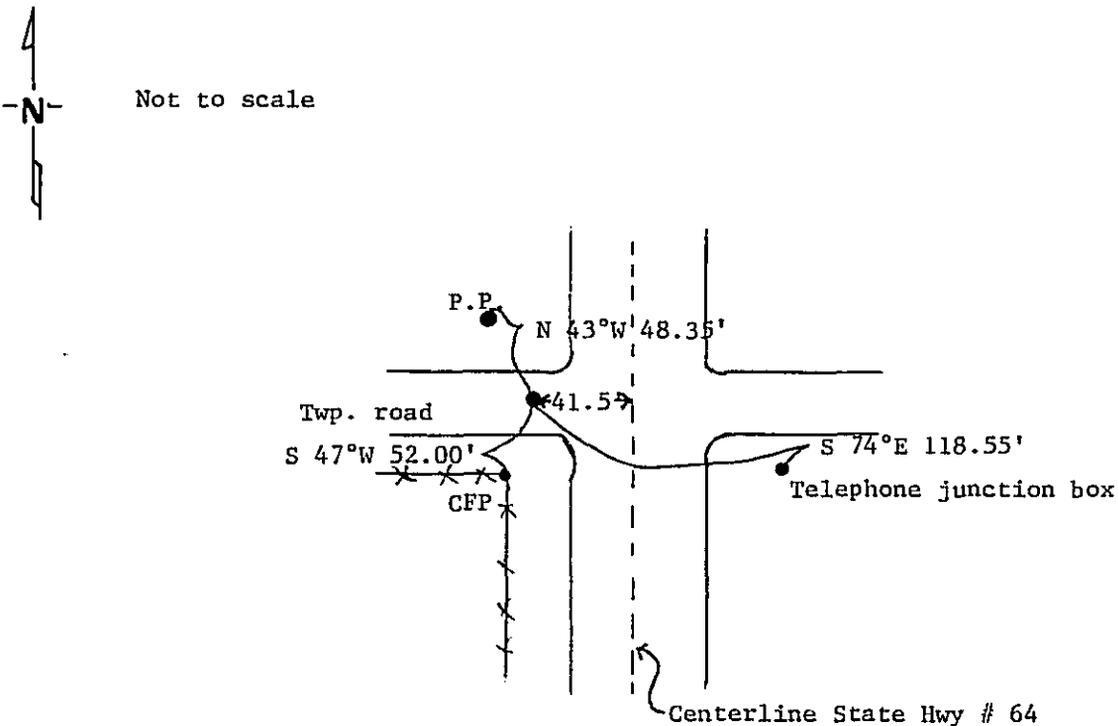

Measurements are to nail in side of object.  
 Bearings are assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297503

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Carr 1-22-87  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:40 A. .M. on the 12 day of June A.D., 19 87

Register of Deeds Claudia Kayh

By MS, Deputy

DOCUMENT NO. 297503

STATEMENT OF EVIDENCE Northeast Corner Section 25, T.135 N., R.32 W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 12" Tam. S  $55\frac{1}{2}^{\circ}$ W 38 lks., 9" Tam. N  $45^{\circ}$ W 30 lks., 6" Tam. N  $74\frac{1}{2}^{\circ}$ E 14 lks., 8" Tam. S  $34^{\circ}$ E 27 lks.
- 1941 Minnesota Highway Dept. assumed corner at intersection of roads. Assumed corner is 41.5' W. of new centerline. Road construction would have destroyed any remaining evidence.
- 1986 On August 26, Terry Freeman, Cass County Survey Technician and Jim Cripps set a county cast iron monument down 0.3' from Hwy. Dept. information, 41.5' W. of centerline.