

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


SOUTHWEST Corner of Section 11, Township 139, Range 30, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 1/5/87 found a 2" iron with 3" plumbers cap 5"  
DATE  
above ground
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

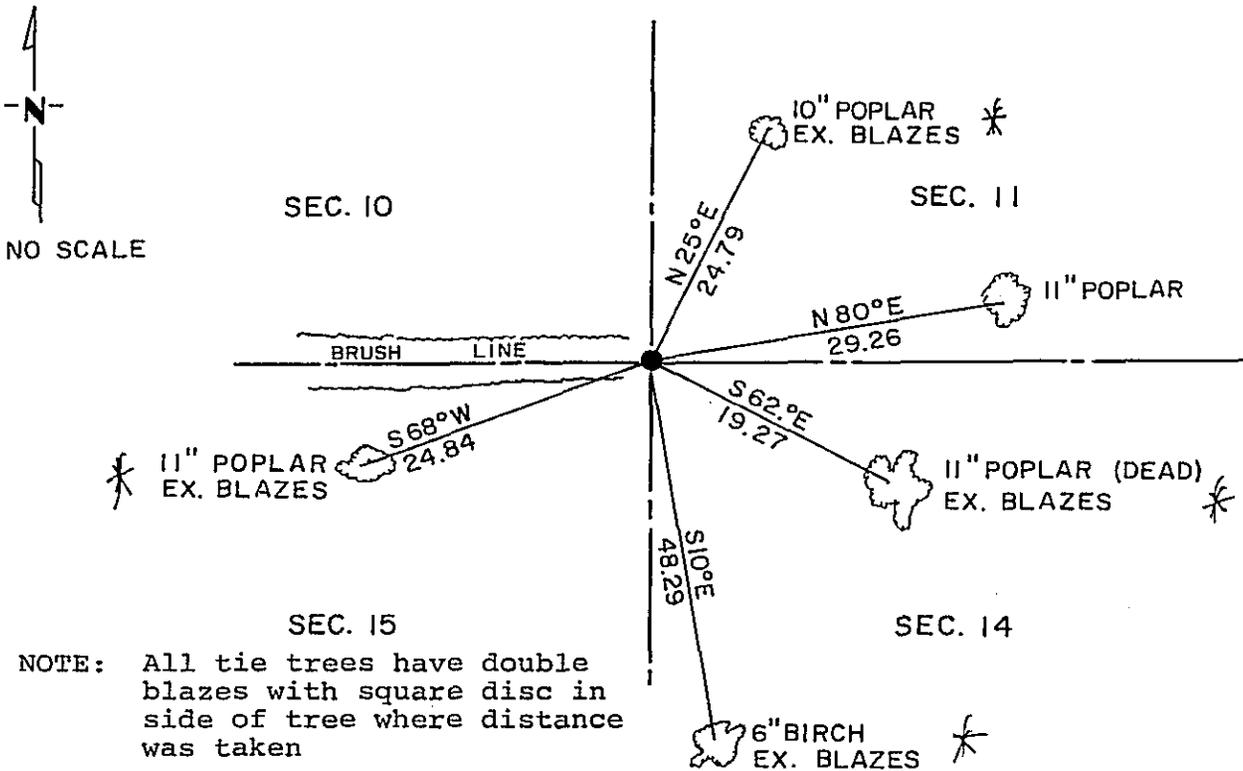

NOTE: All tie trees have double blazes with square disc in side of tree where distance was taken

Statement of evidence relative to this corner location is on back of page. 298534

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel J. Lindber 6/24/87  
SIGNATURE DATE

Registration No. 17008

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the RECORDER'S office at 3:30 P. .M. on the 29 day of July A.D., 19 87

COUNTY RECORDER Claudia Kayler

By MS, Deputy

DOCUMENT NO. 298534

Statement of Evidence:

Southwest corner, Section 11, Township 139 North, Range 30 West,  
5th Principal Meridian, Cass County, Minnesota.

- 1865 - U. S. General Land Office set a wood post for this corner and marked the following bearing trees:  
12" black pine North 67 degrees East, 33 lks, 12" black pine North 37 degrees West 9 lks, 6" black pine South 48½ degrees West 29 lks, 8" black pine South 66 degrees East 30 lks.
- 1915 - F. A. Donner as noted in Cass County Book "D", Page 40 found the Northwest, Southwest and Northeast bearing trees and set an 80 d spike. On Page 43, same book he reset an iron monument and dug pits around monument to mound.
- 1915 - John Curo uses 2½" x 48" iron monument for corner, County Resurvey Plat ("E"-Page 34).
- 1925 - J. M. Greene uses iron monument as noted in Book 190, Page 3 & 4 (Curo's notes) in the subdivision and platting work within said Section 11, Plat of Luroy Bay.
- 1970 - Minnesota DNR survey crews find 1½" capped iron pipe and make 3 new bearing tree ties.
- 1987 - Landecker & Associates, Inc. surveyors, find monument together with Southeast and Northeast ties made by DNR in 1970, and accept this corner to be the same as reset by previous surveyors noted.