

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter Corner of Section 2, Township 141 N, Range 28 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 7/15/87 found a 2"x60" galv. I.P. with brass top, 18" above ground,
30' E. of centerline of County Road.
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES

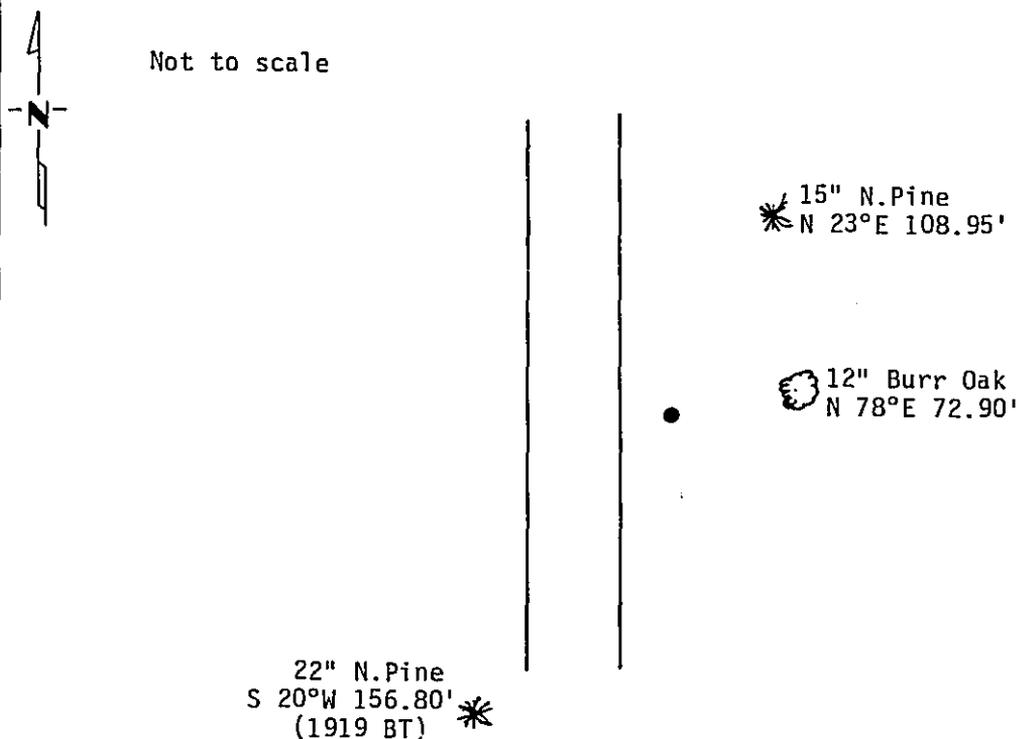

Trees double blazed, scribed, painted red and 54-3 Bearing Tree tag attached. Measurement taken to nail in side of tree.

Statement of evidence relative to this corner location is on back of page. 301673

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter C. Curran 11-23-87
SIGNATURE DATE

Registration No. 11395
 Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:45 A .M. on the 16 day of Dec. A.D., 19 87

County Recorder Clondine Kayh
 By MS, Deputy
 DOCUMENT NO. 301673

Statement of Evidence: East Quarter Corner Section 2, T.141 N., R.28 W., 5th P.M.

- 1874 US General Land Office survey set a wood post for this corner and marked the following bearing tree: Dead Pine EAST 5 lks.
- 1917 County Survey Record Book "B", page 602, shows a survey by E.B. Horst. He set a 3x3x30" poplar post.
- 1919 US General Land Office dependent resurvey set a 1"x36" I.P. with marked brass cap at proportionl position-no original evidence found. The following BT was marked: 8" N.Pine S $36\frac{1}{2}^{\circ}$ W 237 lks.
- 1972 US Forest Service personnel found remains of the 1919 GLO survey-N.Pine S 36° W is now a 25" N.Pine at bearing & distance with scribe visible. A 2"x60" galv. I.P. with brass cap was set. The following bearing trees were marked: 9" Jack Pine N 47° E 89.40', 7" W.Oak N 85° E 72.70', both scribed " $\frac{1}{4}$ " S1 BT", 4x4 Cedar post EAST 1.60'
- 1987 Walt Curo, under Forest Service contract, found 2" I.P. with brass cap as set in 1972. Corner is 30' East of centerline of County Road. 8' steel sign post N 72° E 3'. Bearings shown on front of this certificate. He files this certificate to update the 1972 certificate.