


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 11, Township 141 N., Range 28 W., 5th P.M.
STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

- On 7/15/87 found a 3" brass tablet in concrete, 6" below surface, 20 feet S. of centerline Hwy. 200
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES



Not to scale

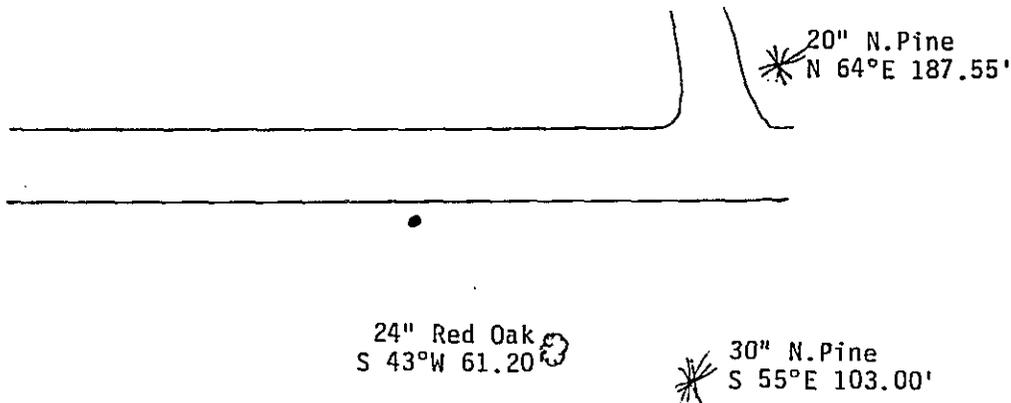

Trees double blazed, scribed, painted red and 54-3 Bearing Tree tag attached. Measurement taken to nail in side of tree.

Statement of evidence relative to this corner location is on back of page. 301682

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William C. Cass 11-23-87
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:30 A.M. on the 16 day of Dec. A.D., 19 87

County Recorder Claudia Keyser

By ms, Deputy

DOCUMENT NO. 301682

Statement of Evidence: Northeast Corner Section 11, T.141 N., R.28 W., 5th P.M.

- 1874 US General Land Office survey set a wood post for this corner and marked the following bearing trees: 15" W.Pine S 75°E 70 lks., 18" W.Pine N 81°E 130 lks.
- 1917 County Survey Record Book "B", pages 601-603, show a survey by E.B.Horst. He found the old post and both original BT stumps. He set a new post and marked new bearings: 12" N.Pine N 7-20 W ?, 10" Poplar S 31 W 129', 12" N.Pine S 55°E 94.5'
- 1918 US General Land Office dependent resurvey found the stumps of both original BT's and set a 1"x36" I.P. with marked brass cap. 24" N.Pine N 36°E 301 lks., 16" W.Pine S 8°E 273 lks., 14" N.Pine S 9½°W 250 lks.
- 1923 Minnesota Highway Department R/O/W map shows corner at PI station 527+37.3
- 1972 US Forest Service personnel found 1918 BT's: Pine SE- scribe visible-rescribe, and pine stump SW with blaze visible and also found 1917 BT SE. Set a 5½" sq. x 24" concrete monument with stamped brass tablet. BT's: 24" N.Pine S 55°E 103.1' "scribed S12 BT", 4"W.Oak S 8°W 98.4' scribed "X BT", 23"N.Pine N 33°E 265.9 scribed "BT", 4x4x72" Cedar post South 18.3' William Okerman filed CERTIFICATE OF LOCATION OF GOVERNMENT CORNER.
- 1987 Walt Curo, under Forest Service contract, found concrete monument and Pine BT S 55 E. Marked new BT's. He files this certificate to update the 1972 certificate.