

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


MEANDER #8 Corner of Section 23/24, Township 141 N., Range 28 W., 5th P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-20-87 found a BRASS CAPPED MONUMENT
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

MAG. DECL: 4 1/2° E

SKETCH OF REFERENCE TIES

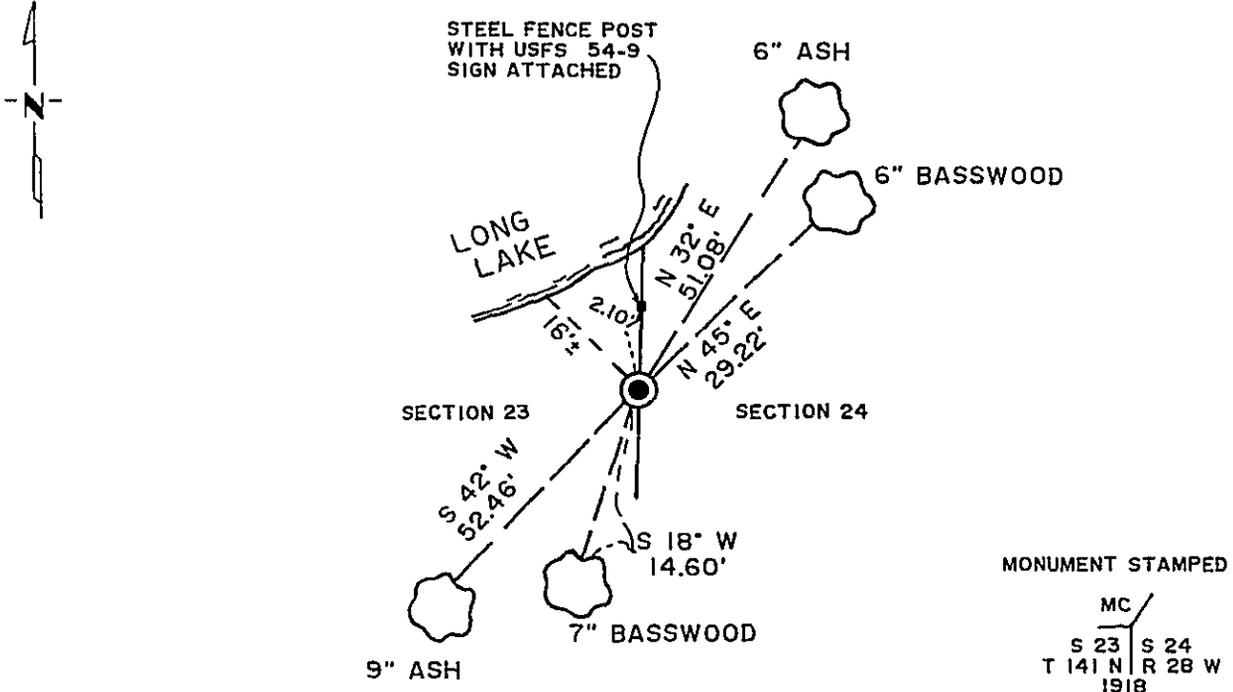

TIES SHOWN ARE TO 16d NAIL IN BASE OF TREE

Statement of evidence relative to this corner location is on back of page. 302191

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Roger A. Mustonen
 Date 1/06/88 Registration No. 11946

OFFICE OF THE COUNTY RECORDER
 County of Cass
 I hereby certify that this document was filed in the Co. Recorders office at 2:55 P. M. on the 8 day of January A.D., 19 88
 County Recorder Claudine Kaylon
 By MS Deputy
 DOCUMENT NO. 302191

Statement of Evidence:

Meander Corner #8 on the West Line of Section 24, Township 141 North, Range 28 West of the 5th Principal Meridian, and on the south side of Long Lake.

1874 P. H. Conger, contract Surveyor for the General Land Office, Set post for M.C.
White Pine 12 in S 23 W 50 lks.
Cedar 6 in N 83 E 26 lks.

1918 Earl G. Harrington, U.S. Cadastral Engineer, notes show: 28.93 To shore of Long Lake, bears E. and W., Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for M.C. bet. secs. 23 and 24, with brass cap mkd... From which

A balsam, 10 ins. diam, bears S.59½°W., 267 lks.
No other trees available for a bearing tree.
Raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor.

29.13 Proportional point for original M.C., unable to find any evidence of the original corner or bearing trees.

1973 William H. Okerman, RLS 6807, filed for record a Certificate of Location of Government Corner, No. 928. Found the Meander Corner of Sections 23-24 which was evidenced by the remains of the General Land Office survey of 1918. No new monument set as G.L.O. monument is in good condition.

Ash 6 inch S45°W 52.60 feet scribed *S23 BT *MC
Ash 4 inch N38°E 51.20 feet scribed *S24 BT *MC
Birch 14 inch S87E 9.90 feet scribed MC S24 BT

1987 Roger A. Mustonen, RLS 11946, under contract with USFS, found the G.L.O. monument and Okermans 3 BTs. However, the Birch was found broken off 6 foot up with scribe still showing. Made new ties to a nail in the base of the trees shown, and accepts the monument as marking the Meander Corner on the West Line of Section 24, on the south side of Long Lake.