

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 25, Township 141 N, Range 28 W, 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE _____
- left monument as found, lowered monument, removed monument (explain)
- On 12-7-87 placed a 2" DIAMETER BY 48" LONG IRON PIPE, WITH A
DATE _____
MAGNETIC BASE AND A BRASS CAP STAMPED TO IDENTIFY CORNER LOCATION.

MAG. DECL: 4 1/2° E

SKETCH OF REFERENCE TIES

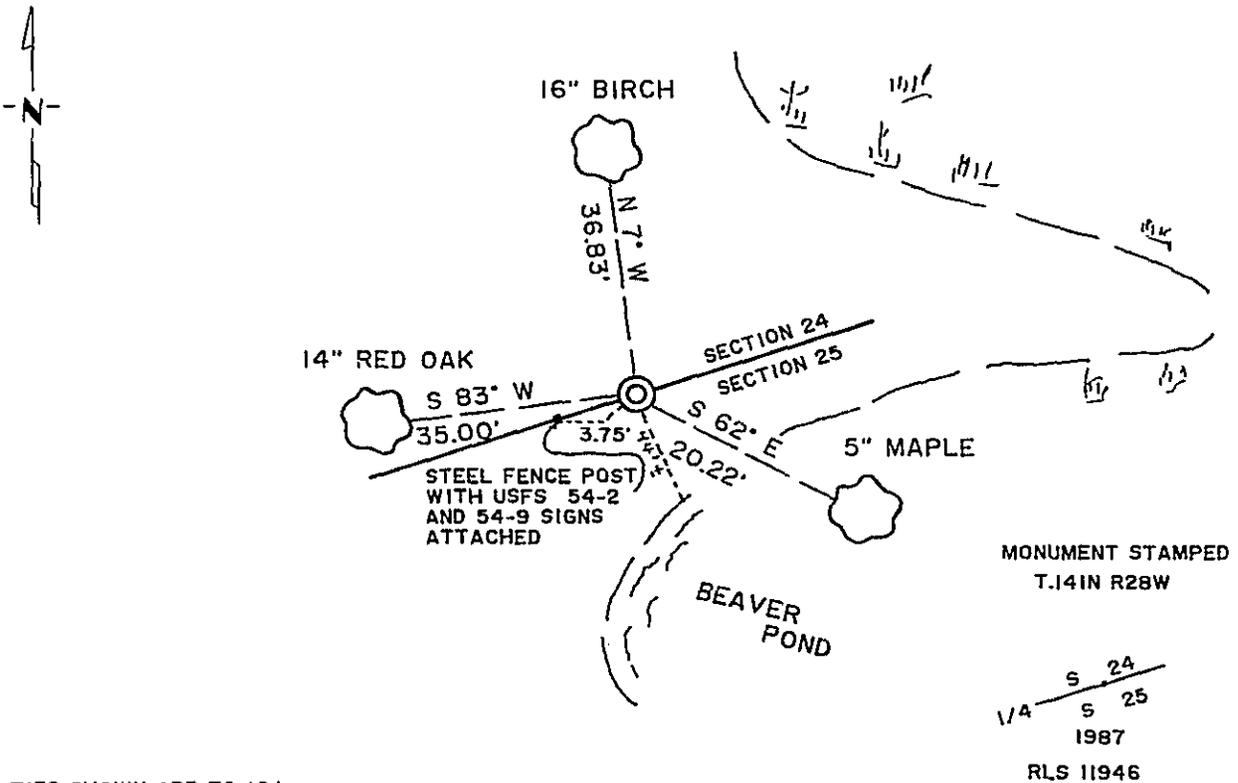

TIES SHOWN ARE TO 16d NAIL IN BASE OF TREE

Statement of evidence relative to this corner location is on back of page.

302193

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Roger A. Mustonen

Date 4/05/88 Registration No. 11946

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:05 P.M. on the 8 day of January A.D., 19 88

County Recorder Chondice Kayler
By MS, Deputy

DOCUMENT NO. 302193

Statement of Evidence: North Quarter Corner of Section 25, Township 141
North, Range 28 West of the 5th Principal Meridian

- 1874 P.H. Conger, contract Surveyor for General Land Office,
Set a post
From which... Basswood 4 in N 46°W 11 lks
Maple 12 in S 38 E 16 lks.
- 1918 Earl G. Harrington, U.S. Cadastral Engineer, Notes show:
The course and length of the line bet. secs. 24 and 25 is
N.72° 56' E., 85.83 chains. I did not run the true line in
this case, and did not re-establish the ¼ sec. cor. of secs.
24 and 25, because there are no Indian Allotments in either
of the sections and therefore it was not necessary to re-
establish the true line on the ground.
- 1987 Roger A. Mustonen, RLS 11946, under contract with USFS,
Made a thorough search of the vicinity where P.H. Conger
could have established it, however, did not find any evidence
of the corner marker or its accessories, therefore, accepted
the single proportionate measurement method to establish
the south quarter corner at mid-point and on line between
section corners. Set a USFS monument, made ties to a nail
in the base of the trees, and accepts monument as the position
for the North Quarter Corner of Section 25.