

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

REFERENCE TO

MENADER NO. 26 Corner of Section 1, Township 140, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9/29/87 found a 1/2" iron pipe on east section line.
DATE

left monument as found, lowered monument, removed monument (explain)

On 12/11/87 placed a 2" x 2" x 36" steel post with a 3" x 3" aluminum
DATE cap for reference to MC No. 26 section line.

SKETCH OF REFERENCE TIES

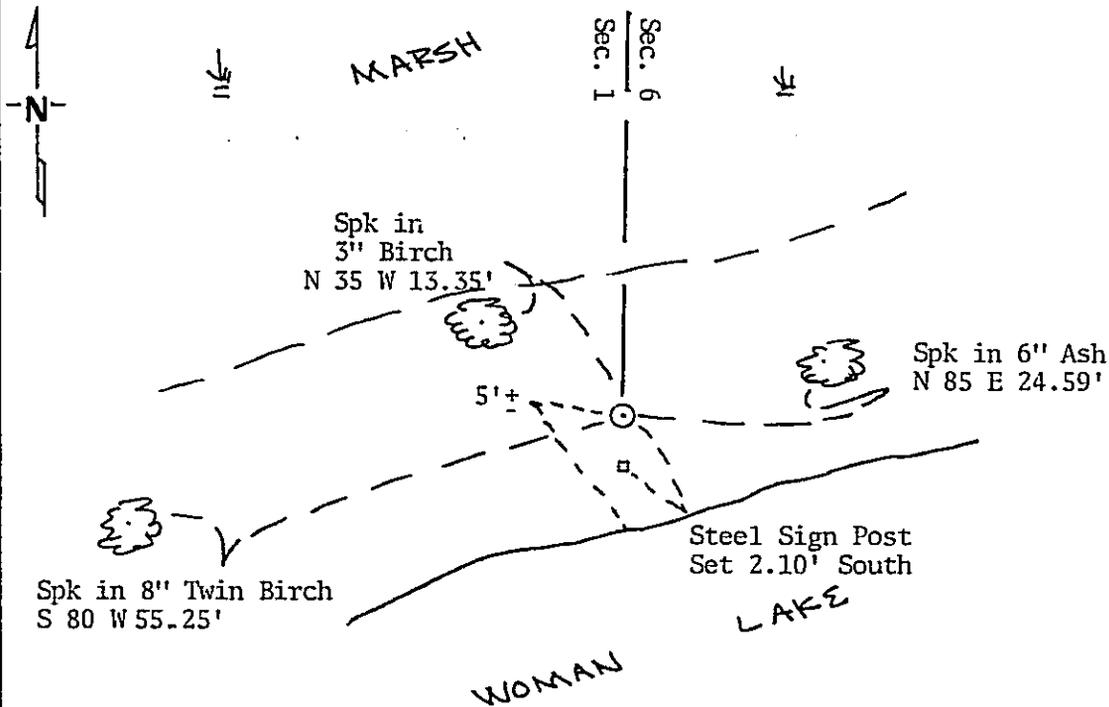

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page. 302549

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Maup H. Stearn 1/18/88
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:20 A.M. on the 3 day of February A.D., 1988

Register of Deeds Claudine Karfer

By MS, Deputy

DOCUMENT NO. 302549

Statement of Evidence:

- 1864 U.S. General Land Office Survey set wood post for this corner and marked the following bearing trees: 15" Elm N 15 E 33 links and 6" Elm N 1 W 28 links.
- 1987 County Surveyor's Records in the Recorder's Office were checked and no re-survey information was found on this corner.
- 1971 Robert F. Schneider, RLS No. 5740, subdivided Sec. 6, 140-28. He ran line from MC No. 27 south to the SE corner of Sec. 13, 140-29. No evidence of this corner was found. Survey notes show he tied into iron monuments on DNR lease lots in Gov't Lot 11, Sec. 1.
- 1987 We traversed the east line of Section 1 and tied into R.F. Schneider traverse points. We also found a $\frac{1}{2}$ " iron pipe with no markings on ice ridge and a $\frac{1}{2}$ " iron pipe with no markings 290.15 feet north. These iron pipes agreed with the line established by Mr. Schneider for the west line of Sec. 6. From the East $\frac{1}{4}$ corner set by Schneider we measured 1809.13 feet to the pipe at the shore. GLO distance from the $\frac{1}{4}$ corner to MC No. 26 is 30.24 chains (1995.84 feet). It appears that the original MC is now under water. This area of Woman Lake is marshy and very shallow. The found pipe is within 2 feet of being on a straight line between the SE corner of Sec. 13 and the NE corner of Sec. 1.

I accepted the pipe found as the best evidence available of the section line and therefore a reference monument to MC No. 26. A Cass County monument was set over the found pipe and ties taken as shown on this Certificate. The actual position of MC No. 26 was not determined.