

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 15, Township 141, Range 27, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 10-10-1987 found a brass capped concrete monument  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES NOT TO SCALE

Monument Marked:  
T141N R27W  
S10 | S11  
S15 | S14  
1968  
RLS 6807

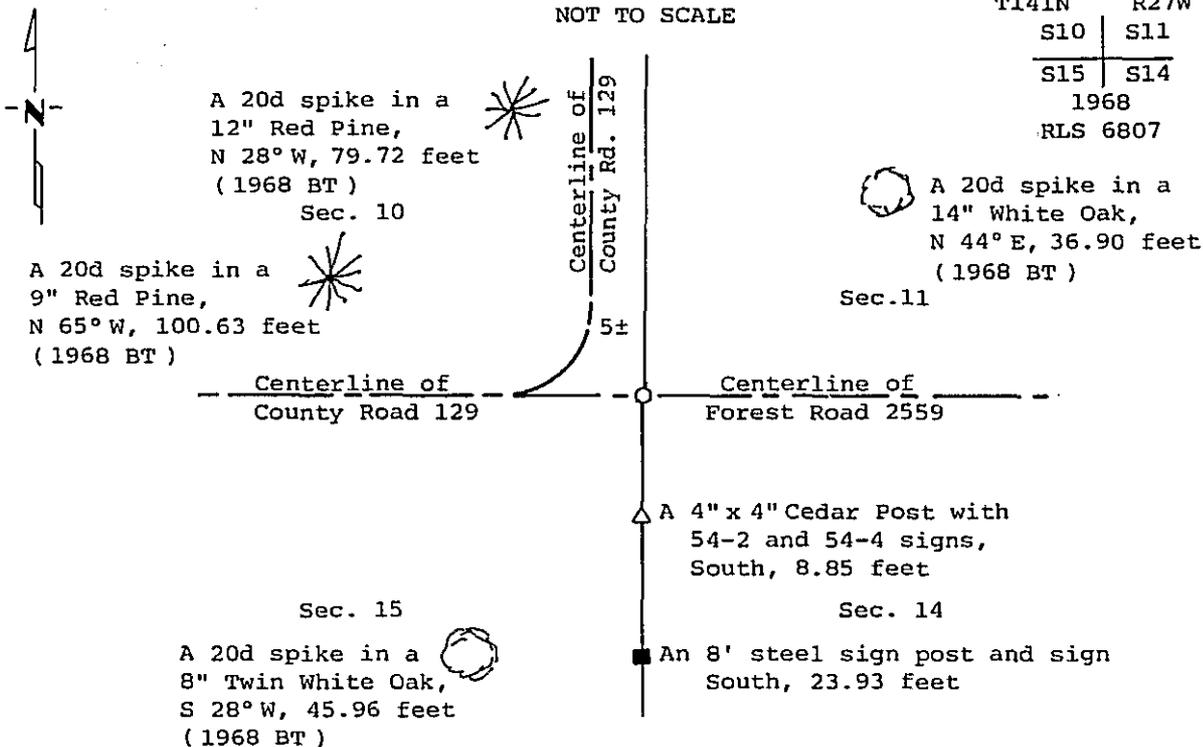

Bearings: Magnetic

All trees tagged with USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

302622

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Robert L. Tom

Date 2-2-88 Registration No. 16459

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:50 P.M. on the 5 day of February A.D., 1988

County Recorder Claudia Kayler  
By m S, Deputy

DOCUMENT NO. 302622

Statement of Evidence:

Northeast corner of Section 15

1-9-1874 P.H. Conger, Deputy Surveyor, set post for corner and witnessed as follows:

Norway 20" North 40 degrees West 70 links (46.20 feet)

Poplar 7" South 52 degrees West 70 links (46.20 feet)

Poplar 7" South 65 degrees East 105 links (69.30 feet)

Said records are filed with the Secretary of State, St. Paul, MN.

1941 R.T. DeFant, CCC, found iron pipe in good condition 5" below road surface and placed a FSLP on 8" tree that bears North 40 degrees East 28.4 feet. Said records are on file with the USFS in Cass Lake, MN.

11-3-1967 J. Ekstrom, USFS, found iron pipe 5" below road as described by DeFant in 1941. Said records are on file with the USFS in Cass Lake, MN.

6-24-1968 L. Elliot, USFS, set 6" x 24" cylindrical concrete monument with a 3" brass tablet, down 1 foot in road intersection and witnessed as follows:

White Oak 12" North 44 degrees East 36.9 feet

Red Pine 10" North 28 degrees West 79.72 feet

Red Pine 7" North 65 degrees West 100.63 feet

White Oak 6" South 28 degrees West 45.96 feet

4' Cedar post with USFS 54-2 & 54-4 signs, South, 8.85 feet

Said records are on file with the USFS in Cass Lake, MN.

11-5-1968 W. Okerman, USFS, visited corner and filed an Affidavit as to Location of Government Corner in the office of the Cass County Register of Deeds on 2-19-1971.

10-10-1987 Personnel of Kovanen Surveying found a 6" concrete monument with a brass cap and a 2" iron pipe down 0.5 feet in gravel road, bent Northerly and 1.25 feet Southwest of concrete monument and all 1968 ties.

An analysis of the above data indicates that this is not a perpetuation of the original GLO corner, but it is accepted as the corner for lack of evidence to the contrary.