

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 10, Township 141, Range 27, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12-2-1987 placed a 2" x 48" brass capped iron pipe
DATE

Monument Marked:

SKETCH OF REFERENCE TIES
NOT TO SCALE

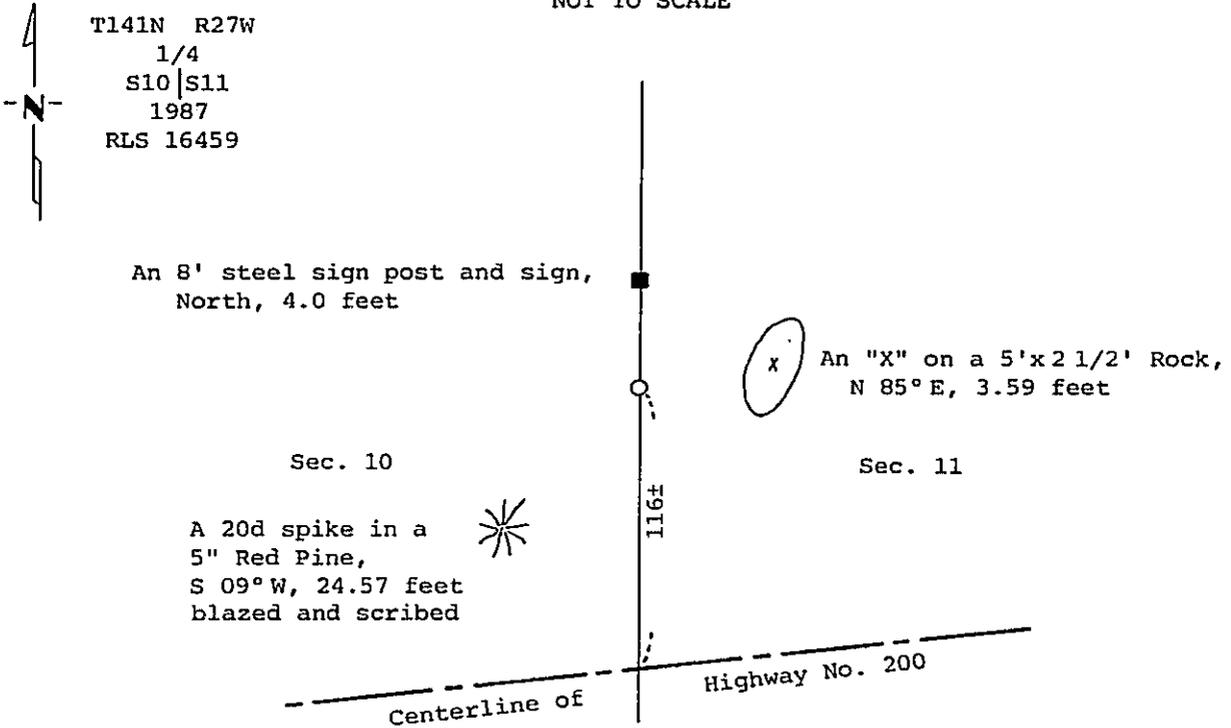

Bearings: Magnetic

All trees tagged with USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 302628

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Robert L. Thomas

Date 2-2-88 Registration No. 16459

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:08 P. M. on the 5 day of February A.D., 19 88

County Recorder Clonine Kay
By ms, Deputy

DOCUMENT NO. 302628

Statement of Evidence:

East Quarter corner of Section 10

1-9-1974 P.H. Conger, Deputy Surveyor set post for corner and witnessed as follows:

White Pine 24" North 12 degrees West 83 links (54.78 feet)
Said records are on file with the Secretary of State, St. Paul, MN.

4-11-1973 C. Krause, USFS, searched for corner and found pine stump, which could be original bearing tree, set 2" Aspen post at GLO bearing and distance and a FSLP on a 10" Red Oak North 60 degrees West 14 feet. He found other pine stumps in area but not as large. Said records are on file with the USFS in Cass Lake, MN.

11-24-1987 Personnel of Kovanen Surveying made a search for original corner evidence at the computed lost position and found 2" Aspen post set by Krause in 1973 and pine stump, also found 30" pine stump 60 feet, more or less, West of Krause stump. Neither stump offered conclusive evidence for perpetuation of the corner position.

12-2-1987 Personnel of Kovanen Surveying set 2" x 4' brass capped iron pipe at single proportioned lost position and witnessed as follows:

"X" on 5'x 2.5' rock North 85 degrees East 3.59 feet
Norway Pine 5" South 9 degrees West 24.57 feet
8' steel sign post and 54-9 sign North 4.0 feet

This is not a perpetuation of the original GLO corner.