


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 27, Township 141, Range 28, 5th P.M.  
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 6-24-86 found a GLO brass cap monument  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

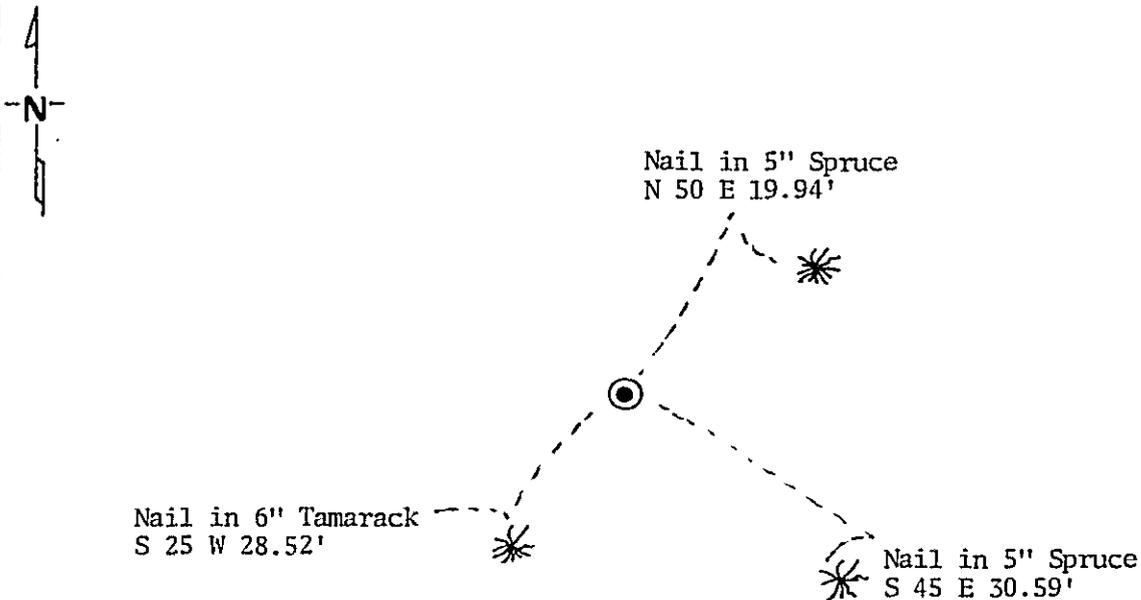

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page. 303655

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Adam H. Atenem 3-28-88  
SIGNATURE DATE

Registration No. 12684

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

## OFFICE OF THE REGISTER OF DEEDS

County of Polk

I hereby certify that this document was filed in the Reg. of Deeds office at 3:40 P .M. on the 12 day of April A.D., 19 88

Register of Deeds Clouline Kayler

By MS, Deputy

DOCUMENT NO. 303655

Statement of Evidence:

- 1874 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 6" Tam. N 18 W 27 links and 9" Tam. N 32 E 26 links.
- 1918 U.S. General Land Office dependent resurvey found the corner marked by a decayed wooden stake and remains of both tamarack bearing trees. The iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 12" Tamarack N 22 E 40 links, 12" R. Oak S 29 E 195 links, 12" Jack Pine S 51½ W 123 links, and 10" Birch N 60 W 120 links.
- 1965 Plat of LIKENS NORTH SHORE BEACH was surveyed by John X. Stark. Plat shows this corner was marked by a G.L.O. monument. Plat is located in Government Lot 4, Section 26.
- 1986 County Surveyor's Records in the recorder's Office were checked and no re-survey information was found on this corner.
- 1986 Found 2" iron pipe GLO monument with marked brass cap in good condition in swamp. Measured west to North ¼ corner of Sec. 27 and south to MC No. 5, both GLO brass cap monuments. Distance check very well with 1918 resurvey distances. Also found following evidence of 1918 GLO bearing trees: 20" R. Oak S 35 E 127.4 feet with old scar and base of down 20" J. Pine with old scar S 50 W 80 feet.
- 1988 Revisited corner and took ties as shown on this certificate.