

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH-SOUTH 1/4 LINE

SPECIAL MEANDER Corner of Section 30, Township 142, Range 28, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 12/15/87 found a USGLO brass cap monument and 1928 bearing tree.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

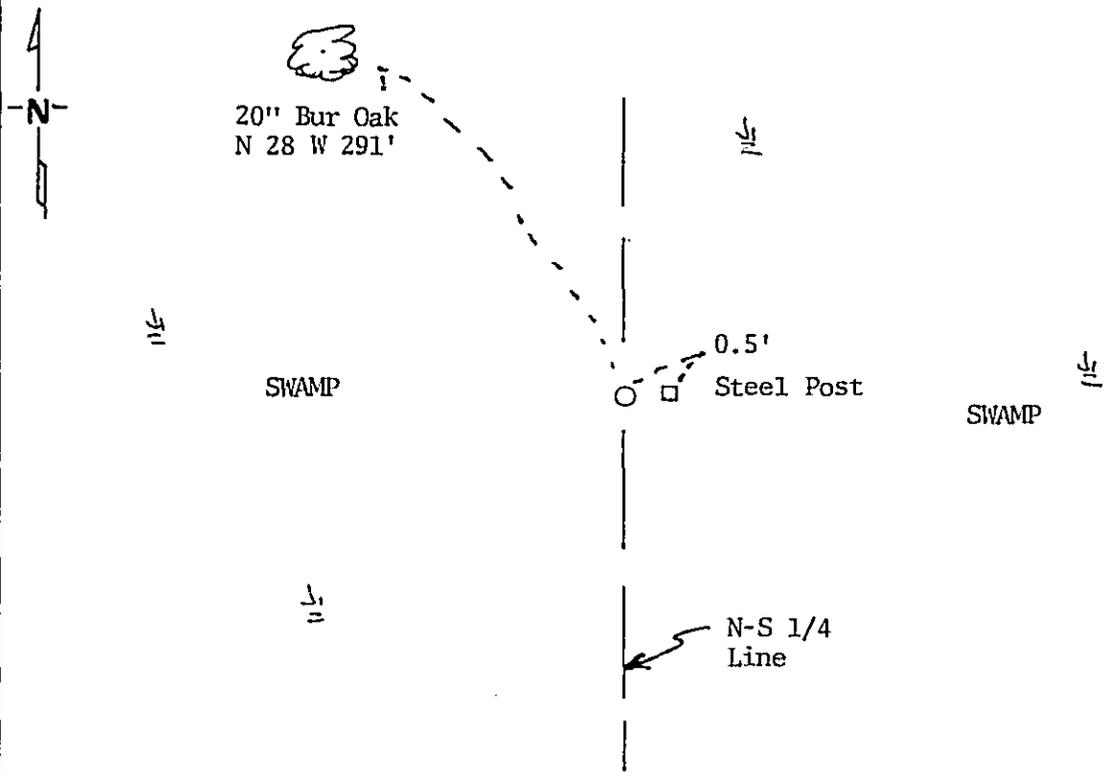

BEARING IS APPROXIMATE

Statement of evidence relative to this corner location is on back of page. 304195

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Amy A. Stevem 4/16/88
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 10:50 A.M. on the 6 day of May A.D., 19 88

Register of Deeds Claudine Kayler
By MS, Deputy

DOCUMENT NO. 304195

Statement of Evidence:

- 1928 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 14" Bur Oak N 28-45 W 441 links (291.06').
- 1987 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1987 U.S. Forest Service office in Cass Lake was contacted for information and no resurvey information was found on this corner.
- 1987 Traversed to corner area and found GLO brass cap monument in good condition down 6" below surface of swamp. Measured 408.96 feet south to the GLO brass cap at the center north 1/16th corner which compared well to the 1928 distance of 409.20 feet. Found a 20" Oak that check for bearing and distance for the 1928 BT. Did not cut open, but tree had a scar facing corner. No additional ties available. Set a steel fence post 0.5' east of the monument.