

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


SMC on W 1/16 Line Corner of Section 9, Township 141 N., Range 29 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/8/87 found a GLO brass cap monument up 1.5' and possible 1918 Cedar
DATE BT N 87°E 39'
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

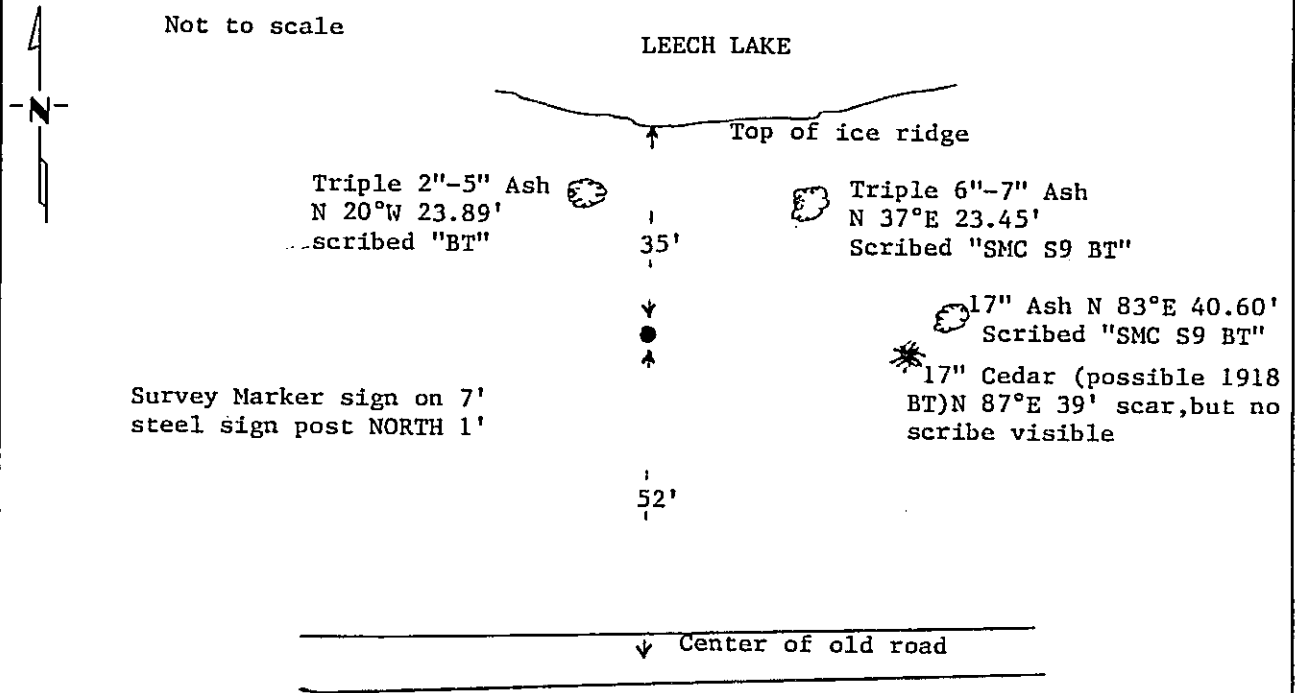

Statement of evidence relative to this corner location is on back of page. 309685

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter L. Linn 1-3-89
SIGNATURE DATE

Registration No. 11395
 Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:55 P. .M. on the 3 day of January A.D., 1989

County Recorder Claudine Koyler
 By Ms, Deputy

DOCUMENT NO. 309685

Statement of Evidence: SMC on W. 1/16 Line, Section 9, T.141 N., R.29 W., 5th P.M.

- 1918 US General Land Office dependent resurvey established this corner by setting a 1" x 36" I.P. with marked brass cap. The following bearing trees were marked: 8" Cedar N 87-15 E 60 lks., 10" Elm S 48-15 W 135 lks.
- 1987 On Sept. 2, a MN Dept. of Natural Resources survey crew found the GLO brass cap monument and possible 1918 BT (17" Cedar N 87°E 39', no scribe, but scar visible). Corner location fits with other corners in the area. Measured to new BT's as shown on front.
- 1987 On Sept 8, Terry Freeman, Cass County Survey Technician, visited corner with the same DNR survey crew. Placed a 7' steel sign post with survey marker sign 1' NORTH and scribed the DNR BT's and put "BT" tags on the trees.