

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 11, Township 141 N., Range 31 W., 5th P.M.
 STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 7/13/87 found a 2" capped T.P. up 16" and GLO 2" capped T.P. 0.5' E.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

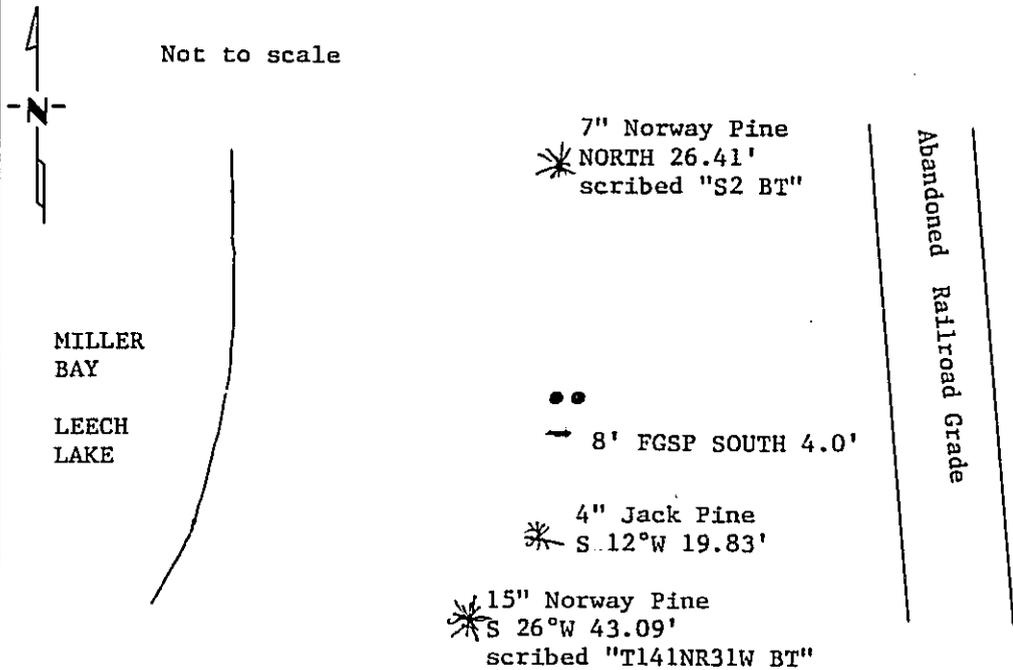

All trees have "BT" tags.

Corner is approx. 40' W. of old RR $\frac{1}{2}$ on steep side hill

Statement of evidence relative to this corner location is on back of page. 309687

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Linn 1-3-89
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:10 P.M. on the 3 day of January A.D., 19 89

County Recorder Clonnie Koyler

By MS, Deputy

DOCUMENT NO. 309687

Statement of Evidence: Northeast Corner Section 11, T.141 N., R.31 W., 5th P.M.

- 1873 US General Land Office survey set a wood post for this corner and marked the following bearing trees: 13" N.Pine S 60 E 90 lks., 8" Pine S 31 W 70 lks., 8"N.Pine N 42 E 60 lks., 10" N.Pine N 67. W 13 lks.
- 1914 John Curo's notes, Book 92, Pages 83-84, show that he found the old stake and old BT's. He set a 2"x48" galv. I.P. with cap.
- 1916 County Survey Record Book "C", page 111, shows a survey by F.F. Wilson. He found an I.M. set previously by John Curo.
- 1917 US General Land Office dependent resurvey found a 2" capped iron set by the County Surveyor. Alongside found iron, set a 2"x36" I.P. with marked brass cap. The following bearings were established: 3" Oak S 5-15 E 43 lks., mound of stone 2' base 1.5' high WEST of cor.
- 1942 County Survey Record Book "D", pages 276-277, show a survey by John Curo. He found the 2"x48" galv. I.P. and also a 2" brass cap monument set by GLO 0.5' EAST. He says the county iron is in the true position and marked the following bearings: Triple 5, 7, 8" W. Birch N 46-30 E 147', 7" W. Birch N 32-30 W 31', Twin 5, 6" W. Oak S 32-15 W 33.40', 8"N.Pine S 87-30 E 107'.
- 1982 Cass County Survey Technician, Terry Freeman and County Forester, Dennis Hummitzsch, found both 2" I.P.'s with caps. Rough chained to other corners in the area and distances checked well.
- 1987 Terry Freeman and Curt Krause, US Forest Service, found both I.P.'s with caps. Place rock ring around pipes and an 8' FGSP SOUTH 4.0'. Mark three new trees as shown on this certificate.