

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


South one-sixteenth Corner of Sections 1 & 2, Township 141 N., Range 31 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 7/13/87 found a 2" capped galv. I.P. up 20" and a 1" GLO brass cap
DATE
monument on N. side of other pipe up 10"
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

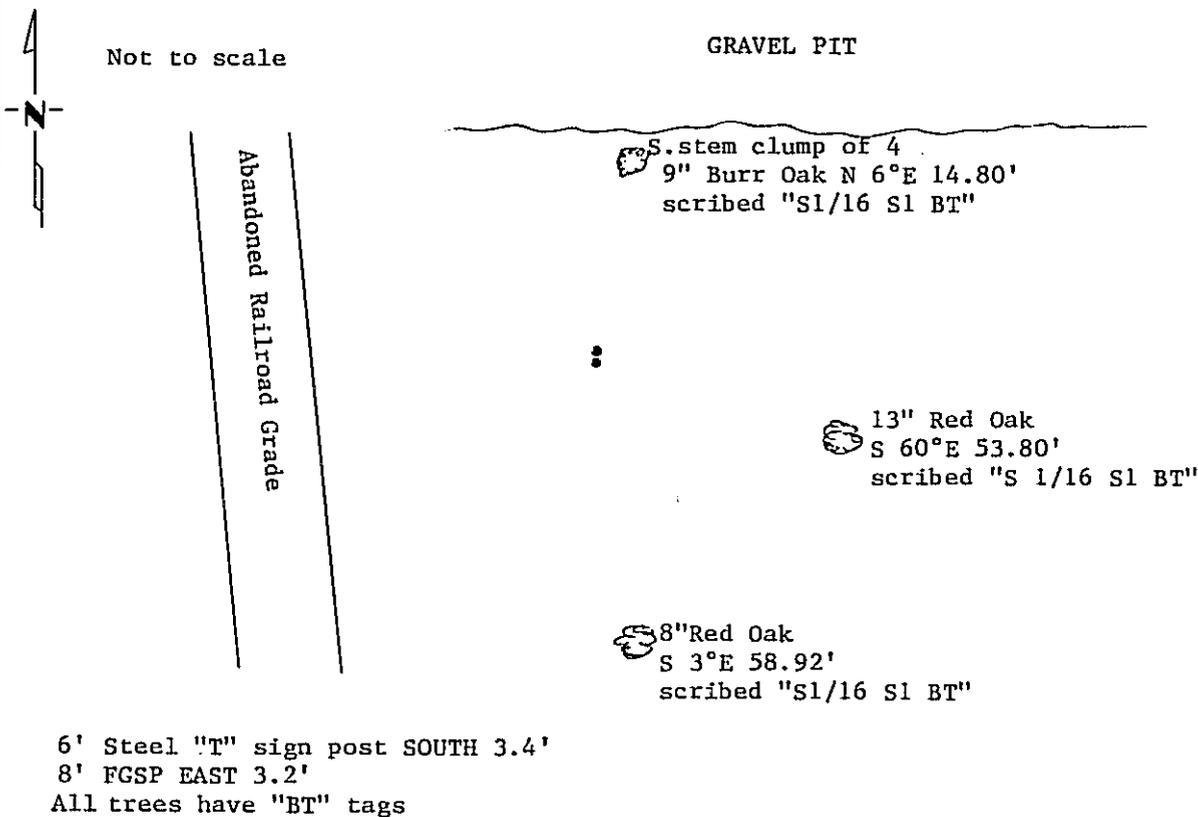

Statement of evidence relative to this corner location is on back of page. 309688

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John E. Con 1-3-89
SIGNATURE DATE

Registration No. 11395
 Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:15 P. on the 3 day of January A.D., 1989

County Recorder *Cloudeine Kayler*
 By *MS*, Deputy

DOCUMENT NO. 309688

Statement of Evidence: South one-sixteenth Corner, Sections 1&2, T.141 N., R.31 W.,
5th P.M.

- 1914 John Curo's notes, Book 92, pages 88-89, show a survey he set a 2"x48" galv. I.P. with cap in mound. Corner sets in a reveue.
- 1917 US General Land Office dependent resurvey found corner to be marked by a 2" galv. I.P. North and alongside set a 1"x36" I.P. with marked brass cap. Raised mound of stone 2' base 1½' high W. of cor.
- 1987 On July 13, Terry Freeman, Cass County Survey Technician and Curt Krause, US Forest Service found both I.P.'s with caps. 2" I.P. is up 20" and 1"GLO iron is up 10". Chained south to MC and distance fits well.
- 1987 On August 10, Curt Krause returned to corner and fixed up new BT's as shown on the front of this certificate.