

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 16, Township 134 N., Range 31 W., 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 10/30/85 found a 1/2"x18" I.P. down 0.5' in road intersection
DATE

left monument as found, lowered monument, removed monument (explain)

On 10/23/86 placed a 2"x18" telespar monument with stamped aluminum cap
DATE
down 1'

SKETCH OF REFERENCE TIES

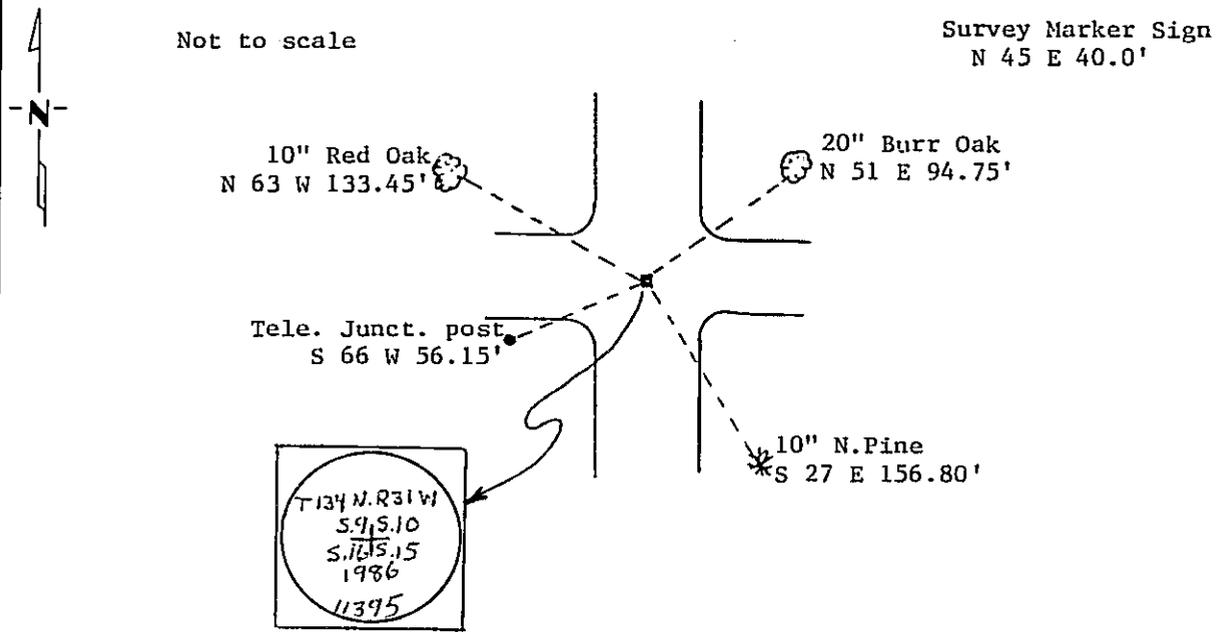

Statement of evidence relative to this corner location is on back of page. 309797

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Green 1-9-89
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Pearl

I hereby certify that this document was filed in the Co. Recorders office at 4:20 P. .M. on the 9 day of January A.D., 1989

County Recorder Clondine Kayler

By ms, Deputy

DOCUMENT NO. 309797

Statement of Evidence: Northeast Corner Section 16, T. 134 N., R. 31 W., 5th P.M.

- 1869 US General Land Office survey set a wood post for this corner and marked the following bearing trees: 6" Aspen N 80 W 45 lks., 10" Aspen S 49 W 28 lks., 8" Aspen N 72E 31 lks., 6" Aspen S 37 E 29 lks.
- 1912 County Survey Record Book "A", pages 473-477, show a survey by John Curo. He found the corner previously established by Curo from SE BT stump and roots of NE & SW BT's. He reestablished corner from SE BT stump.
- 1915 County Survey Record Book "B", page 484-495, show a survey by N.D. Gorman. He found an I.M. for corner.
- 1985 On Oct. 30, Terry Freeman, Cass County Survey Technician, found a ½"x18" I.P. down 0.5' in road intersection.
- 1986 On Oct. 23, Terry Freeman and Land Dept. crew, removed found ½" I.P. and replaced it with a 2"x18" telespar monument with stamped aluminum cap, down 1'