

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 18, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch: Latitude: 47° 02' 17.29397"
 Longitude: 94° 30' 47.36919"

On 6/27/88 found a 2 inch Iron Monument with a Brass Cap.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail in side of tree.
 Not to Scale

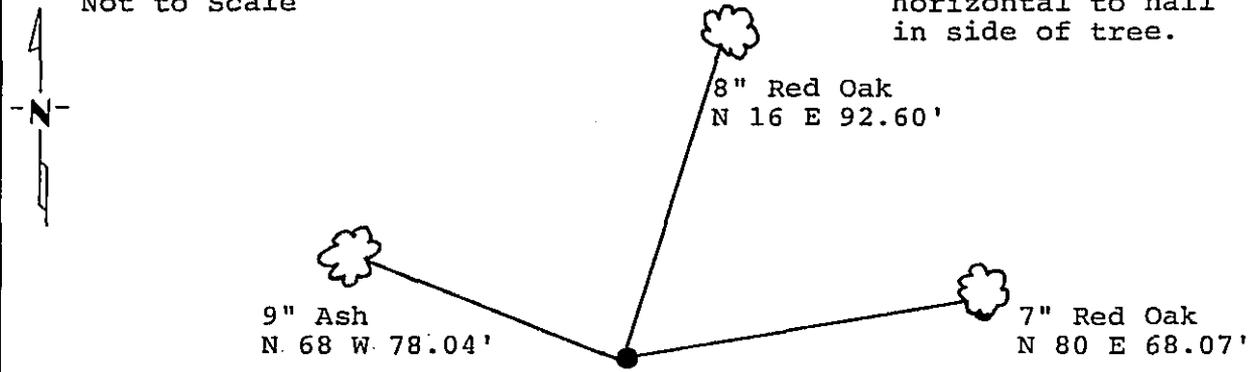

Monument is located in a small swamp. Set 8 foot sign post on Northerly side for stabilization. 8 foot sign post East 3.2 feet.

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped

T 141 N	R 30 W
S 7	S 8
S 18	S 17
1917	

Statement of evidence relative to this corner location is on back of page. 309833

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 12-15-88 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:40 A. .M. on the 12 day of January A.D., 19 89

County Recorder Claudia Kayler
 By ms, Deputy

DOCUMENT NO. 309833

Statement of Evidence:

Northeast Corner Section 18, Township 141 North,
Range 30 West, Cass County, Minnesota

J-5 141-80
Bk.5 Pg.17

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 5 inch Birch North 70 degrees West a distance of 70 links; a 8 inch Birch North 60 degrees East a distance of 15 links; a 9 inch Poplar South 37 and 1/2 degrees West a distance of 22 links; and a 4 inch Poplar South 19 degrees East a distance 10 links.

1917 U.S. General Land Office dependant resurvey reestablished this corner proportionally. An iron pipe with a marked brass cap was set to mark the corner. The following witness was marked: A mound of stone with a 2 foot base 1 and 1/2 feet high set west of corner.

1937 Civilian Conservation Corps found a 2 inch iron pipe in place in good condition. Put Forest Service Location Poster on a 5 inch Aspen North 86 degrees West a distance of 55 links.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 27 and July 20 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: 2 inch brass cap monument up 18 inches in swamp. Set 8 foot sign post on northerly side to stabilize. New bearings were marked and sign post set as shown on front of this certificate. Area South of corner and swamp is a cutover clearcut.