

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Indian Reservation

Closing Corner _____ Corner of Section 16, Township 141 N, Range 30 W, 5th P.M.

East Line
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 01'29.49022"
Longitude: 94° 28'14.91960"


On 6/27/88 found a 2" iron monument with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE


Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.



7" Burr Oak
N 84 W 27.13'

13" Burr Oak
S 32 W 55.97'

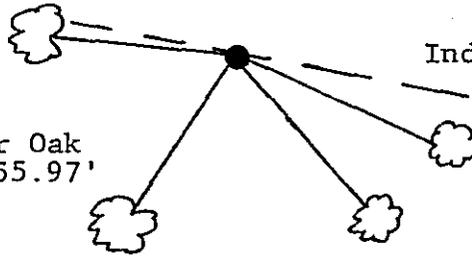

9" Birch
S 40 E 62.60' Monument Stamped

Indian Reservation Boundary

10" Red Oak
S 65 E 82.29'

Monument is located in mature Aspen stand 500' more or less north of Forest Service Trail #3735 Sign post S 81 E 5.0'

T 141 N R 30 W

Res. ~~line~~ S 15

S 16 1978

R.L.S. No. 12261

Statement of evidence relative to this corner location is on back of page. 309840

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker

Date 12-15-88 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:15 A. .M. on the 12 day of January A.D., 19 89

County Recorder Phyllis Kayler

By ms, Deputy

DOCUMENT NO. 309840

Statement of Evidence: Closing Corner on Reservation Line Sections 15 and 16, Township 141 North, Range 30 West, Cass County, Minnesota

M-N 13 141-30
Bk.5 Pg.21

1979 U.S. Forest Service set a 2 inch iron pipe with a marked brass cap to mark this corner, using proportional methods.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 27 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: 2 inch brass cap monument up 2 feet; carried out 8 foot sign post that was out of ground; 1978 ties: a 7 inch Burr Oak North 84 degrees West a distance of 27.13 feet; a 13 inch Burr Oak South 32 degrees West a distance of 55.97 feet; and a 10 inch Red Oak South 65 degrees East a distance of 82.29 feet. New bearing tree: a 9 inch Birch South 40 degrees East a distance of 62.60 feet. Set 8 foot sign post South 81 degrees East a distance of 5.0 feet with signs 54-2 and 54-9.