

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast Corner of Section 32, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 58' 48.13425"  
 Longitude: 94° 29' 29.38783"


On 6/29/88 found a 2 inch Iron Monument with a Brass Cap.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

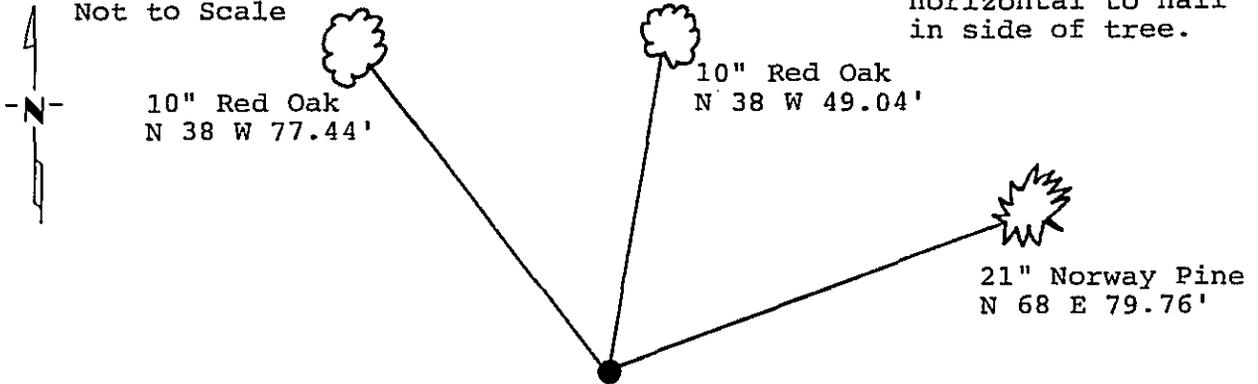

Monument is located 60 feet, more or less, Northerly of new logging road on Northerly facing slope.  
 Sign post North 5.0 feet.  
 Sign post West 5.0 feet.

Monument Stamped

T 141 N R 30 W  
 S 32 | S 33  
 S5  
 T 140 N  
 1965

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

RLS No. 6807

Statement of evidence relative to this corner location is on back of page. 309850

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker

Date 12-15-88 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:10 A. M. on the 12 day of January A.D., 1989

County Recorder Claudine Kayla  
 By Ms, Deputy

DOCUMENT NO. 309850

Statement of Evidence: Standard Southeast Corner Section 32, Township  
141 North, Range 30 West, Cass County, Minnesota

Z-9 141-30  
Bk.5 Pg.25

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 8 inch Yellow Pine North 14 degrees West a distance of 13 links; and a 6 inch Yellow Pine North 69 degrees East a distance of 13 links.

1965 U.S. Forest Service found the corner monumented with burned stumps of both original bearing trees with scribe visible. Set a 2 inch by 60 inch iron pipe with brass cap; a 6 foot sign post West 4.1 feet; a 8 inch Oak North 3 degrees East a distance of 49.0 feet; and a 15 inch Norway Pine North 62 degrees East a distance of 80.1 feet.

1965 U.S. Forest Service Surveyor Bill Okerman filed corner certificate.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a brass cap monument up 18 inches with 1 and 1/2 inch iron pipe along East side; find remains of both original bearing tree stumps; 1965 bearing tree now 21 inch Norway Pine North 68 degrees East a distance of 79.76 feet; 1965 bearing tree now a 10 inch Red Oak North 8 degrees East a distance of 49.04 feet. New bearings: a 10 inch Red Oak North 38 degrees West a distance of 77.44 feet; pulled old signs and set 8 foot post North 5.0 feet and West 5.0 feet with signs 54-2 and 54-9.