

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


MEANDER Corner of Section 18/17, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 01' 39.567"
 Longitude: 94° 23' 09.122"

- On 6/30/88 found a 1" iron monument with a brass cap
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail in side of tree.
 Not to Scale

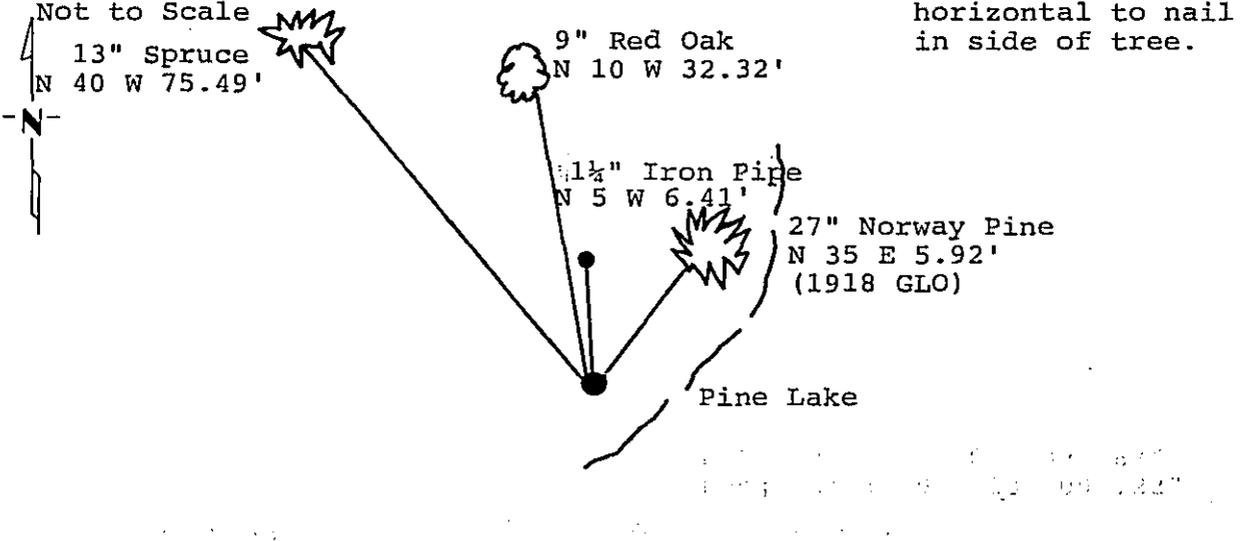

Monument is located on point on north-westerly side of Pine Lake
 8' steel sign post West 3.0'

Monument Stamped
 T 141 N R 29 W
S 18 | S 17
 MC
 1918

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 310036

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.
David S. Landecker
 Date 1-18-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass
 I hereby certify that this document was filed in the Co. Recorders office at 9:10 A.M. on the 25 day of January A.D., 1989
 County Recorder Clarence Kayler
 By ms, Deputy
 DOCUMENT NO. 310036

Statement of Evidence:

Meander Corner Section 17, Township 141 North,
Range 29 West, Cass County, Minnesota

L-M5 141-29
Bk.6 Pg.10

1873 P.H. Conger, U.S. Deputy Surveyor, originally surveyed Sections 17, 18, 19 and 20 while subdividing Township 141 North, Range 29 West. His notes indicate a different mathematical position for Pine Lake than actually exists. No meander corner was set at this location.

1918 U.S. General Land Office dependant resurvey established this corner while resurveying Sections 17 and 18 said township. This survey also meandered Pine Lake and notes the lake in its proper location in their records. An iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 30 inch Norway Pine North 35 degrees East a distance of 8 links; and an 8 inch Poplar North 62 degrees 15 minutes West a distance of 79 links.

1981 U.S. Forest Service records show the following: found General Land Office brass cap and the Northeast Pine bearing tree; County iron pipe Northerly 10 feet, more or less.

1988 on June 30 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: monument up 8 inches with rocks around base; 1918 bearing tree now a 27 inch Norway Pine North 35 degrees East a distance of 5.92 feet; a 1 and 1/4 inch County pipe North 5 degrees West a distance of 6.41 feet. 2 new bearing trees were marked and an 8 foot steel sign post set as shown on front of this certificate, accepting and witnessing the 1918 General Land Office monument.