

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

MEANDER Corner of Section $\frac{17}{20}$, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

Latitude: 47° 01' 20.907"
Longitude: 94° 22' 29.196"

On 6/30/88 found a 1" iron monument with a brass cap



left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

Magnetic Decl: 5° East
Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

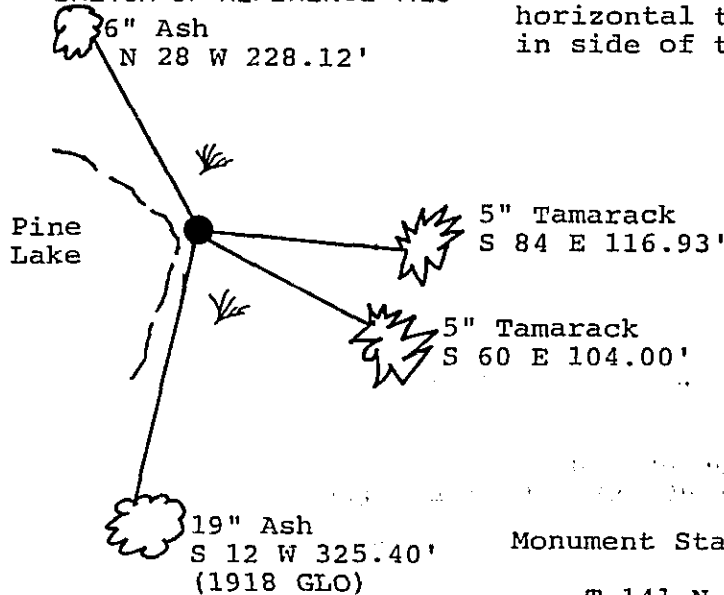

Monument is located at edge of swamp grass and water of Pine Lake set 8' sign post and wire to monument on east side to stabilize 8' steel sign post East 3.0'

19" Ash
S 12 W 325.40'
(1918 GLO)

Monument Stamped

MC $\left\{ \begin{array}{l} T 141 N \\ S 17 \\ S 20 \end{array} \right.$
R 29 W

1918

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

310039

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker

David S. Landecker

Date 1-18-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:40 A.M. on the 25 day of January, A.D., 1989

County Recorder Claudia Kayler

By ms, Deputy

DOCUMENT NO. 310039

Statement of Evidence:

Meander Corner Section 17, Township 141 North,
Range 29 West, Cass County, Minnesota

N7-8 141-29
Bk.4 Pg.18

1873 P.H. Conger, U.S. Deputy Surveyor, originally surveyed Sections 17, 18, 19 and 20 while subdividing Township 141 North, Range 29 West. His notes indicated a different mathematical position for Pine Lake than actually exists. No meander corner was set at this location.

1918 U.S. General Land Office dependent resurvey established this corner while resurveying Sections 17 and 18 said township. This survey also meandered Pine Lake and noted the lake in its proper location in their records. A 1 inch by 36 inch iron pipe with brass cap was set to mark the corner. The following bearing trees were marked: an 8 inch Birch North 73 degrees 15 minutes East a distance of 486 links; and a 12 inch Elm South 12 degrees 45 minutes West a distance of 493 links.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 30 a Landecker-Stevenson & Associates crew searched for the corner using computations to determine search area. The following information was found: brass cap monument up 12 inches at edge of swamp, a 19 inch Ash South 12 degrees West a distance of 325.38 feet (493 links, scribe overgrown), set 8 foot steel sign post on East side to stabilize; set 8 foot steel sign post East 3.0 feet and marked the following bearing trees: a 6 inch Ash North 28 degrees West a distance of 228.12 feet; a 5 inch Tamarack South 60 degrees East a distance of 104.00 feet; and a 5 inch Tamarack South 84 degrees East 116.93 feet.