

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 29, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 00' 28.006"
 Longitude: 94° 21' 53.878"

On 7/1/88 found a 1 inch iron pipe monument
DATE


left monument as found, lowered monument, removed monument (explain)

On 7/18/88 placed a 2 x 48" iron monument with a brass cap
DATE

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree

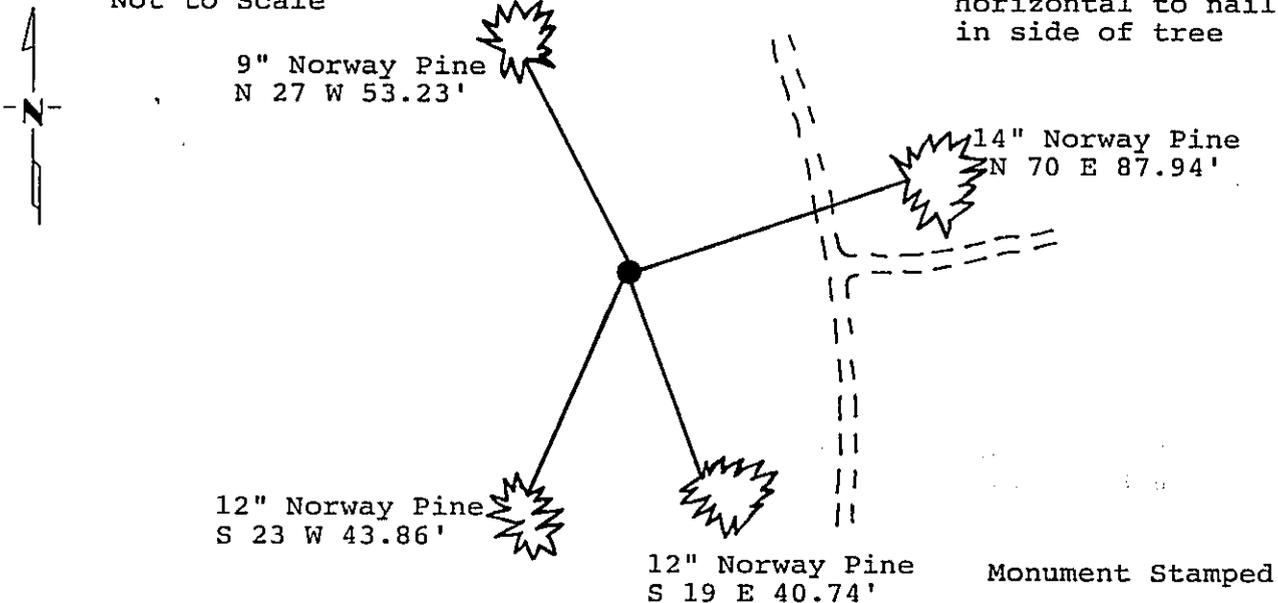

Monument is located
 70' WSW of "T" of
 Forest Service Trail
 #2108 in Norway Pine
 plantation
 8' steel sign post North

All trees are painted with
 red enamel and marked with
 a 5.0⁵⁴₇₃ (Bearing Tree) tag.

Monument Stamped

T 141 N	R 29 W
S 20	S 21
S 29	S 28

1988

RLS 17008

Statement of evidence relative to this corner location is on back of page. 310045

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 1-18-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:40 A.M. on the 25 day of January A.D., 19 89

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 310045

Statement of Evidence: Northeast Corner Section 29, Township 141
North, Range 29 West, Cass County, Minnesota

R-9 141-29
Bk.6 Pg.1

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 24 inch Yellow Pine South 56 degrees East a distance of 7 links; a 25 inch Yellow Pine North 33 degrees West a distance of 37 links; a 24 inch Yellow Pine South 78 degrees West a distance of 34 links; and a 20 inch Yellow Pine South 26 degrees East a distance of 13 links.

1937 U.S. Forest Service records show the following: J.A. Ghelhaug established this corner by proportion on the tower survey in Section 20, Township 141 North, Range 29 West. A monument was set.

1965 U.S. Forest Service records show the following: J. Ekstrom found no evidence of corner.

1981 U.S. Forest Service records show the following: C.K. and L.W. chained from iron pipe on reservation line and found a 1 inch by 18 inch iron pipe flush with ground, presumed to be that as established by Ghelhaug in 1937.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on May 11 a Landecker & Associates crew visited the corner and found the following evidence: a 1 inch monument as targeted by USFS and then located in traverse, to determine values.

1988 on July 1 a Landecker-Stevenson & Associates crew searched for the corner using computations to determine search area. The following information was found: a 1 inch iron monument; set in proportional position as determined in 1937 USFS Survey by Ghelhaug: no evidence of original bearing trees in this area.

1988 on July 18 a Landecker-Stevenson & Associates crew set a 2 inch iron pipe with brass cap in place of Ghelhaugs 1 inch iron pipe. 4 bearing trees are shown on front of this certificate, 8 foot steel sign post is in place as noted.