

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 26, Township 141N, Range 29W, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch: Latitude: 47° 00' 33.198"  
 Longitude: 94° 18' 12.524"

On 6-7-88 found a 2" iron monument with brass cap  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail  
 Not to Scale in side of tree.

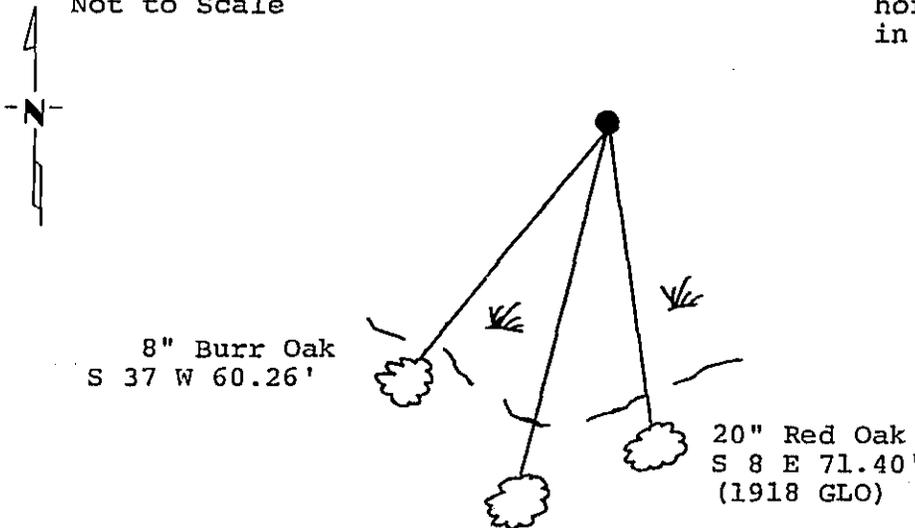

Monument is located in south edge of swamp 500'± west southwest of private trail  
 Set 8' sign post on south side of monument to stabilize  
 8' sign post north 5.0'

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped

T 141 N	R 29 W
S 23	S 24
S 26	S 25
1918	

Statement of evidence relative to this corner location is on back of page. 310672

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 2/28/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:50 P.M. on the 1 day of March A.D., 1989

County Recorder Clarence Kayler  
 By MS, Deputy

DOCUMENT NO. 310672

Statement of Evidence:

Northeast Corner Section 26, Township 141  
North, Range 29 West, Cass County, Minnesota

R-21 141-29  
Bk.4 Pg.23

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witness: a Norway Pine South a distance of 113 links.

1918 U.S. General Land Office dependent resurvey reestablished this corner from the stump of the original bearing tree and an iron pipe with a marked brass cap was set to mark this corner. The following bearing trees were marked: a 7 inch White Oak South 7 and 3/4 degrees East a distance of 107 links; a 7 inch White Oak South 13 and 3/4 degrees West a distance of 196 links; and an 8 inch Poplar North 3 and 1/2 degrees West a distance of 496 links.

U.S. Forest Service records indicate in an U.S. Forest Service field book that form 458 is on a bearing tree: a 12 inch White Oak South 16 degrees East a distance of 71.94 feet from corner.

1986 U.S. Forest Service technicians C.K., J.A., and G.B. found the corner monumented with a 2 inch General Land Office iron pipe and cap. The following 1918 bearing trees were found: a 20 inch White Oak South 8 degrees East a distance of 70.62 feet, has old rusty tag, scribe rotted out; and a 20 inch Red Oak South 13 degrees West a distance of 129.36 feet, scar visible.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 7 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 2 inch General Land Office brass cap monument; 1918 General Land Office bearing trees now a 20 inch Red Oak South 8 degrees East a distance of 71.40 feet and a 20 inch Burr Oak South 13 degrees West a distance of 128.67 feet. New bearing trees were marked and steel sign posts set as shown on front of this certificate.