

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

RESERVATION LINE

CLOSING _____ Corner of Section 27, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 00' 23.894"
 Longitude: 94° 19' 38.998"

On 6/10/88 found a 2" iron monument with a brass cap

DATE



left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree

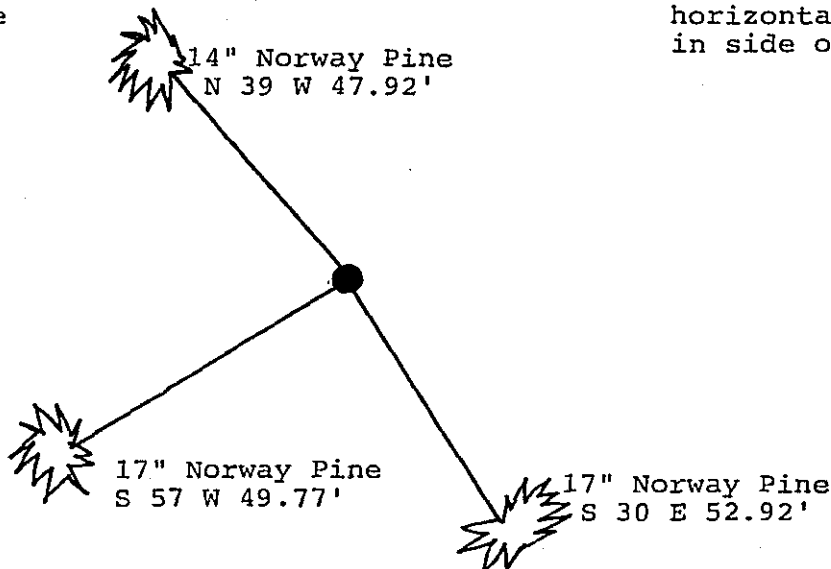

Monument Stamped

T 141 N R 29 W
 CC

S 27 S 26
 1918

Monument is located in large Norway Pine stand 200' more or less northerly of road 8' sign post north 5.0'

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 310675

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel A. Schube 2/28/89
 SIGNATURE DATE

Registration No. 17008

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:25 P. M. on the 1 day of March A.D., 19 89

Register of Deeds Claudine Kayler

By MS, Deputy

DOCUMENT NO. 310675

Statement of Evidence: Closing Corner on Reservation Line Sections 26 and 27, Township 141 North, Range 29 West, Cass County, Minnesota

R-S17 141-29
Bk.4 Pg.39

1873 P. H. Conger, Deputy Surveyor, while subdividing Township 141 North, Range 29 West, notes that the south boundary of the Leech Lake Reservation is 25.25 chains north of the East Quarter corner of said Section 27.

1918 U.S. General Land Office dependent resurvey established this corner with a 2 inch by 36 inch iron pipe, with a marked brass cap by single proportion. The following bearing trees were marked: an 8 inch Norway Pine North 19 degrees 45 minutes East a distance of 21 links; and an 8 inch Norway Pine North 41 degrees 15 minutes West a distance of 54 links.

1964 U.S. Forest Service records show the following: personnel found brass cap monument in good condition and both bearing tree stumps with scribes visible. New bearing trees marked: an 11 inch Norway Pine South 74 degrees West a distance of 24.3 feet; and a 14 inch Norway Pine South 22 degrees East a distance of 30.3 feet.

1967 U.S. Forest Service Surveyor, Bill Okerman, filed corner certificate using the 1964 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 10 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 2 inch General Land Office brass cap monument up 4 inches in good condition, both 1964 bearing trees are cut off to 1 foot stumps. New bearing trees were marked and steel sign post set as shown on front of this certificate.