

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 19, Township 141 N, Range 30 W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 01' 25.228"
 Longitude: 94° 30' 49.108"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/19/88 placed a 2 inch by 24 inch Iron Monument with
DATE Brass Cap.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

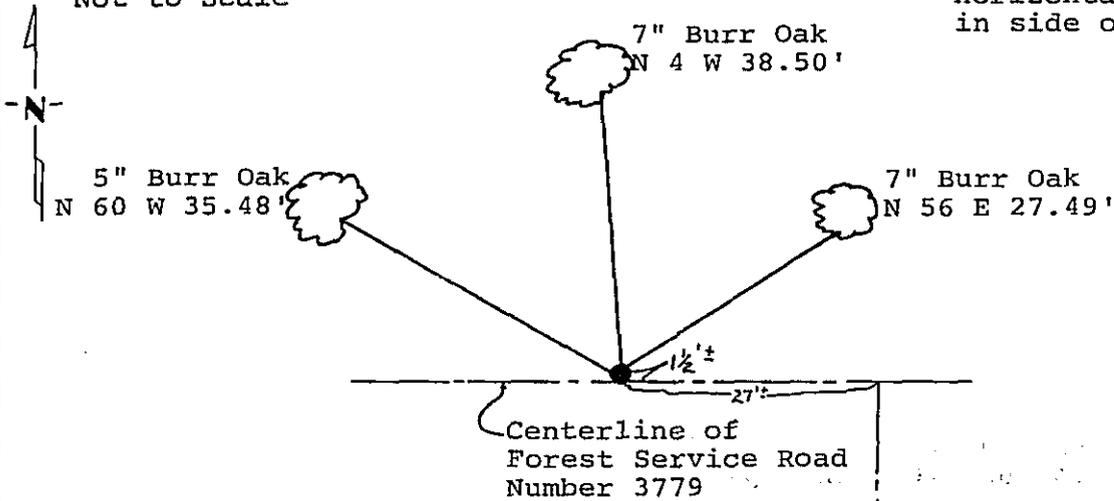

Monument is located 1 and 1/2 feet, more, or less, Northerly of Forest Service Road Number 3779 and 27 feet, more or less, West of Forest Service Trail Number 3777.

Centerline of Forest Service Trail Number 3777

Monument Stamped
 T 141 N R 30 W
 S 18 | S 17
 S 19 | S 20
 1988

8 foot sign post North 15.0 feet.

RLS No. 17008

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 310677

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

OFFICE OF THE COUNTY RECORDER
 County of Cass

David S. Landecker
 David S. Landecker
 Date 2/28/89 Registration No. 17008

I hereby certify that this document was filed in the Co. Recorders office at 3:20 P. .M. on the 1 day of March A.D., 1989
 County Recorder Claudia Kaye
 By ms, Deputy
 DOCUMENT NO. 310677

Statement of Evidence:

Northeast Corner Section 19, Township 141
North, Range 30 West, Cass County, Minnesota

N-5 141-30
Bk.4 Pg.71

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 24 inch White Pine South 57 and 1/2 degrees East a distance of 37 links; a 12 inch Poplar South 55 degrees West a distance of 77 links; a 7 inch Poplar North 42 and 1/2 degrees West a distance of 107 links; and a 24 inch White Pine North 26 degrees East a distance of 227 links.

1914 County Surveyor's Record Book B pages 516-520 show survey by James Middleton. He found stake set for corner from old Government bearing tree stumps.

1917 U.S. General Land Office dependant resurvey found the corner marked by old wood stake and the Southeast and Northeast bearing tree stumps.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 14 a Landecker-Stevenson & Associates crew searched for the corner using compass and chain to determine search area. The following information was found: position falls in South edge of South wheel track in East-West Forest Service Road Number 3779. No evidence of post or accessories.

1988 on September 19 a Landecker-Stevenson & Associates crew set a 2 inch by 24 inch iron pipe with brass cap with rered in base at the proportional position developed from the 1917 General Land Office notes and maps. This position also compares will with the location as measured in the 1914 County survey. 3 new bearing trees weré marked as shown and a steel sign post was set as noted on front of this certificate.