

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 20, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

Latitude: 47° 01' 24.470"
 Longitude: 94° 30' 10.294"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/19/88 placed a 2 inch by 36 inch Iron Monument with Brass
DATE
Cap.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

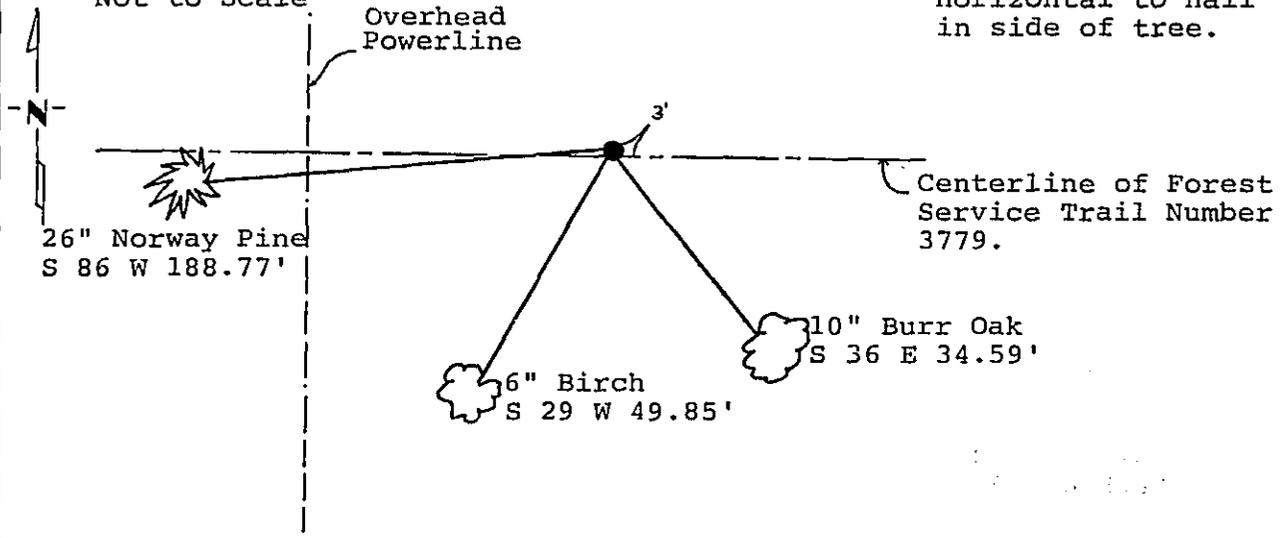

Monument is located
 3 feet North of Forest
 Service Trail Number
 3779 and 95 feet, more
 or less, East of Powerline running
 North and South.
 8 foot sign post North 10.0 feet.

Monument Stamped
 T 141 N R 30 W
 S 17
 S 20
 1988
 RLS No. 17008

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 310678

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota

David S. Landecker
 David S. Landecker
 Date 2/8/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:25 P. M. on the 1 day of March A.D., 19 89
 County Recorder Claudine Kayler
 By MS, Deputy
 DOCUMENT NO. 310678

Statement of Evidence:

North Quarter Corner Section 20, Township 141
North, Range 30 West, Cass County, Minnesota

N-7 141-30
Bk.4 Pg.68

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 4 inch Yellow Pine South 49 degrees East a distance of 18 links; and a 10 inch Poplar North 47 degrees West a distance of 32 links.

1914 County Surveyor's Record Book B pages 516-520 show survey by James Middleton. He found stake set for corner from old Government bearing tree stumps.

1917 U.S. General Land Office dependant resurvey found the corner marked by old wood stake and Southeast bearing tree stump.

1964 U.S. Forest Service records show the following: J. Ekstrom found 1937 Forest Service Location Poster and Pine stump. No corner found.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 14 a Landecker-Stevenson & Associates crew searched for the corner using compass and chain to determine search area. The following information was found: position falls in South wheel track of East-West Forest Service Trail Number 3779. No evidence of post or accessories. This area was cut and excavated when the road was established.

1988 on September 9 a Landecker-Stevenson & Associates crew set a 2 inch by 36 inch iron pipe with brass cap with rered in base at the proportion position developed from the 1917 General Land Office notes and maps. This position also compares well with the location as measured in the 1914 County survey. 3 bearing trees are shown on front of this certificate, steel sign post is in place as noted.