

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 21, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch: Latitude: 47° 01' 23.255"
 Longitude: 94° 28' 53.348"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/15/88 placed a 2 inch by 54 inch Iron Monument with
DATE
Brass Cap

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

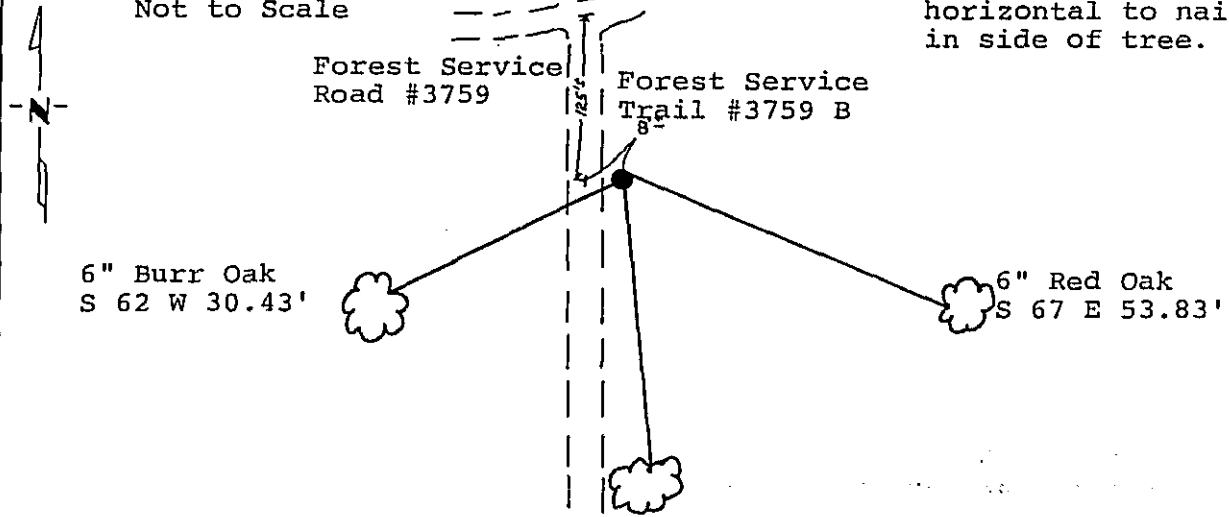

Monument is located 8 feet, more or less, East of Forest Service Trail Number 3759 B and 125 feet, more or less, South of Forest Service Road Number 3759. 8 foot sign post North 5.0 feet.

Monument Stamped
 T 141 N R 30 W
 S 16
 S 21
 1988
 RLS No. 17008

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 310679

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 2/28/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Plex
 I hereby certify that this document was filed in the Co. Recorders office at 3:30 P. M. on the 1 day of March A.D., 1989
 County Recorder Claudine Kayler
 By MS, Deputy
 DOCUMENT NO. 310679

Statement of Evidence:

North Quarter Corner Section 21, Township 141
North, Range 30 West, Cass County, Minnesota

N-11 141-30
Bk.4 Pg.70

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 30 inch White Pine North 14 and 1/2 degrees East a distance of 123 links; and a 30 inch White Pine South 76 degrees East a distance of 56 links.

1914 County Surveyor's Record Book B pages 516-520 show survey by James Middleton. He set a wood hub from old Government bearing trees, a stump and a stub.

1917 U.S. General Land Office dependant resurvey found the corner marked by stumps of both original bearing trees and old wood stake.

1964 U.S. Forest Service records show the following: Ekstrom searched for corner, found nothing.

1973 U.S. Forest Service records show the following: C. Krause searched for corner, found nothing.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 15 a Landecker-Stevenson & Associates crew searched for the corner using compass and chain to determine search area. The following information was found: position falls east of east edge of Forest Service Trail Number 3759 B. No evidence of post or White Pine bearing trees.

1988 on September 15 a Landecker-Stevenson & Associates crew set a 2 inch by 54 inch iron pipe with brass cap and plastic base with magnet at the proportional position developed from the 1917 General Land Office notes and maps. This position also compares well with the location as measured in the 1914 County survey.

3 new bearing trees are shown on front of this certificate, steel sign post is in place as noted.